

**Environmental Research and Consultancy Department**



## **ERCDC REPORT 0708**

### **London Stansted Airport**

### **Strategic Noise Maps 2006**

**D J Monkman  
J McMahon**

---

**[www.caa.co.uk](http://www.caa.co.uk)**

## **ERCD REPORT 0708**

### **London Stansted Airport**

### **Strategic Noise Maps 2006**

**D J Monkman  
J McMahon**

---

#### **Summary**

This report presents the strategic noise mapping contours for Stansted Airport 2006 as detailed in Statutory Instrument 2006 No 2238 The Environmental Noise (England) Regulations 2006.

The authors of this report are employed by the Civil Aviation Authority. The work reported herein was carried out on behalf of the Department for Transport.

Any views expressed are not necessarily those of the Secretary of State for Transport.

© Crown Copyright 2007. Such copyright is managed through the Department for Transport, under delegation from the Controller of Her Majesty's Stationery Office.

© Civil Aviation Authority

Population data used in this report are based on 2001 Census data (updated in 2005) supplied by CACI Information Services.

© CACI Ltd 2007 All Rights Reserved.

ISBN 978 0 11790 972 4

Enquiries regarding the content of this publication should be addressed to:  
Environmental Research and Consultancy Department, Directorate of Airspace Policy, Civil Aviation Authority, CAA House, 45-59 Kingsway, London, WC2B 6TE.

The latest version of this document is available in electronic format at [www.caa.co.uk](http://www.caa.co.uk), where you may also register for e-mail notification of amendments.

Published by TSO (The Stationery Office) on behalf of the UK Civil Aviation Authority.

Printed copy available from:

TSO, PO Box 29, Norwich NR3 1GN  
Telephone orders/General enquiries: 0870 600 5522  
Fax orders: 0870 600 5533

[www.tso.co.uk/bookshop](http://www.tso.co.uk/bookshop)  
E-mail: [book.orders@tso.co.uk](mailto:book.orders@tso.co.uk)  
Textphone: 0870 240 3701

# Contents

	<b>Glossary of Terms and Abbreviations</b>	vi
<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>London Stansted Airport</b>	<b>2</b>
<b>3</b>	<b>Measures to Reduce Aircraft Noise Currently in Place</b>	<b>2</b>
<b>4</b>	<b>Aircraft Operations</b>	<b>10</b>
<b>5</b>	<b>Noise Contours</b>	<b>11</b>
	<b>References</b>	<b>13</b>
Table 1	Distribution of Stansted average daily aircraft movements by ANCON type (annual 12 hour day 0700 - 1900 Local Time)	14
Table 2	Distribution of Stansted average daily aircraft movements by ANCON type (annual 4 hour evening 1900 - 2300 Local Time)	15
Table 3	Distribution of Stansted average daily aircraft movements by ANCON type (annual 8 hour night 2300 - 0700 Local Time)	16
Table 4	Percentage of Stansted average departures by route for day, evening and night	17
Table 5	Stansted 2006 – Areas, populations and households within contour bands	18
Figure 1	Stansted Airport runway layout	19
Figure 2	Stansted Airport Standard Instrument Departure routes	20
Figure 3	Stansted Airport Year 2006 annual 12 hour $L_{day}$ terrain adjusted noise contours (0700-1900 LT) actual modal split 66% south west / 34% north east	21
Figure 4	Stansted Airport Year 2006 annual 4 hour $L_{evening}$ terrain adjusted noise contours (1900-2300 LT) actual modal split 66% south west / 34% north east	22

Figure 5	Stansted Airport Year 2006 annual 8 hour $L_{\text{night}}$ terrain adjusted noise contours (2300-0700 LT) actual modal split 66% south west / 34% north east	23
Figure 6	Stansted Airport Year 2006 annual 16 hour day $L_{\text{Aeq,16hr}}$ terrain adjusted noise contours (0700-2300 LT) actual modal split 66% south west / 34% north east	24
Figure 7	Stansted Airport Year 2006 annual 24 hour $L_{\text{den}}$ terrain adjusted noise contours actual modal split 66% south west / 34% north east	25
<b>Appendices</b>		
A	ANCON Type Descriptions	26

Intentionally Blank

## Glossary of Terms and Abbreviations

<b>ANCON</b>	The UK civil aircraft noise contour model, produced and maintained by ERCD.
<b>ANMAC</b>	Aircraft Noise Monitoring Advisory Committee. The committee is chaired by the Department for Transport and comprises, among others, representatives of the airlines, Heathrow, Gatwick and Stansted airports and airport consultative committees.
<b>ATC</b>	Air Traffic Control.
<b>BAA</b>	BAA plc, the company which own and runs Heathrow, Gatwick and Stansted airports amongst others, and is responsible for the operation of the NTK system.
<b>dB</b>	Decibel units describing sound level or changes of sound level.
<b>dBA</b>	Units of sound level on the A-weighted scale.
<b>DfT</b>	Department for Transport (UK Government).
<b>ERCD</b>	Environmental Research and Consultancy Department of the Civil Aviation Authority.
<b>ICAO</b>	International Civil Aviation Organization.
<b>ILS</b>	Instrument Landing System.
<b>L<sub>Amax</sub></b>	The maximum A-weighted sound level (in dBA) measured during an aircraft fly-by.
<b>Leq</b>	Equivalent sound level of aircraft noise in dBA, often called equivalent continuous sound level. For conventional historical contours this is based on the daily average movements that take place in the 16 hour period (0700-2300 LT) during the 92 day period 16 June to 15 September inclusive.
<b>L<sub>day</sub></b>	Equivalent sound level of aircraft noise in dBA for the 12 hour <b>annual</b> day.
<b>L<sub>evening</sub></b>	Equivalent sound level of aircraft noise in dBA for the 4 hour <b>annual</b> evening.
<b>L<sub>night</sub></b>	Equivalent sound level of aircraft noise in dBA for the 8 hour <b>annual</b> night.
<b>L<sub>Aeq,16h</sub></b>	For this report, equivalent sound level of aircraft noise in dBA for the 16 hour <b>annual</b> day.
<b>L<sub>den</sub></b>	24 hour day, evening, night sound level in dBA based on annual traffic and the evening movements are weighted by 5 dB and night movements are weighted by 10 dB.
<b>NATS</b>	Formerly known as National Air Traffic Services Ltd. NATS provides air traffic control services at several major UK airports, including Heathrow, Gatwick and Stansted.

<b>NNI</b>	Noise and Number Index. The noise exposure measure that preceded Leq.
<b>NPR</b>	Noise Preferential Route.
<b>NTK</b>	Noise and Track Keeping monitoring system. The NTK system associates radar data from air traffic control radar with related data from both fixed (permanent) and mobile noise monitors at prescribed positions on the ground.
<b>PNdB</b>	Perceived Noise Level, measured in PNdB. Its measurement involves analyses of the frequency spectra of noise events as well as the maximum level.
<b>QC</b>	Quota Count – the basis of the London airports Night Restrictions regime.
<b>SEL</b>	The Sound Exposure Level generated by a single aircraft at the measurement point, measured in dBA. This accounts for the duration of the sound as well as its intensity.
<b>SOR</b>	Start-of-roll: The position on a runway where aircraft commence their take-off runs.



Intentionally Blank

## 1 Introduction

### 1.1 Background

1.1.1 For every year, the Environmental Research and Consultancy Department (ERCD) of the Civil Aviation Authority estimates the amount of aircraft noise experienced by people living around London Stansted Airport during the **summer months (mid June – mid September)**. The noise exposure measure is the Equivalent Continuous Sound Level, Leq (**16-hour 0700 – 2300 Local Time**) in dBA. The background to the use of this index is explained in DORA Report 9023 (Ref 1). The method by which noise maps, or contours of Leq, are prepared using the ANCON Noise Model is described in DORA Report 9120, R&D Report 9842 and ERCD Report 0606<sup>1</sup> (Refs 2, 3 and 4). The contours are generated by a computer model validated with noise measurements, which calculates the emissions and propagation of noise from arriving and departing air traffic.

1.1.2 The latest summer 16-hour Leq contours for Stansted 2006 are described in ERCD Report 0703 (Ref 5) which is available for download from the Department for Transport (DfT) website at [www.dft.gov.uk](http://www.dft.gov.uk). Contours for the summer 16-hour period are presented from 57 to 72 dBA Leq in steps of 3 dB.

### 1.2 Strategic Noise Mapping

1.2.1 ERCD were commissioned by the DfT to carry out the Strategic Noise Mapping for Stansted Airport as outlined in Statutory Instrument 2006 No 2238 The Environmental Noise (England) Regulations 2006.

1.2.2 Unlike the conventional summer 16-hour Leq contours, the Environmental Noise Regulations requires the following parameters,  $L_{day}$ ,  $L_{evening}$ ,  $L_{night}$ ,  $L_{Aeq,16hr}$ , and  $L_{den}$ . All these parameters are based on air traffic movements over the entire year (unlike conventional contours that are based on the air traffic data during the summer months mid June to mid September).  $L_{den}$  is the 24 hour day, evening, night sound level in dBA with the evening movements weighted by 5 dB and the night movements weighted by 10 dB. Also, air noise contours for strategic noise mapping are presented in 5 dB steps from 55 dBA to 75 dBA except for  $L_{night}$  where the contours are presented between 50 dBA and 70 dBA.

1.2.3 This report sets out the methodologies used in the computation of the strategic noise mapping contours and includes the resulting contours for each of the required parameters.

1.2.4 The 2006 strategic noise mapping contours shown in this report take into account the topography around Stansted by accounting for terrain height in the modelling process. This was achieved by geometrical corrections for source-receiver distance and elevation angles, other more complex effects such as lateral attenuation from uneven ground surfaces and noise screening/reflection effects due to topographical features were not taken into account. ERCD holds terrain height data<sup>2</sup> obtained from Ordnance Survey on a 200 m by 200 m grid for England and Wales. Interpolation

---

<sup>1</sup> ERCD Report 0606 will be published shortly.

<sup>2</sup> Meridian<sup>®</sup> 2 data revised 2006.

was performed to generate height data at each of the calculation points on the 100 m by 100 m receiver grid for use by the ANCON noise model.

- 1.2.5 Numerical results for a 10 m by 10 m grid for each of the required parameters have also been provided. Although not shown on the contour figures, this grid is large enough to cover the extent of a theoretical 50 dBA contours for  $L_{\text{day}}$ ,  $L_{\text{evening}}$ ,  $L_{\text{Aeq,16hr}}$  and  $L_{\text{den}}$  and a theoretical 45 dBA contour for  $L_{\text{night}}$ .

## 2 London Stansted Airport

### 2.1 Location

- 2.1.1 The airport has one runway and one terminal. It is situated 35 miles (56 km) north east of London and is surrounded by countryside and small villages to the north south and east and the town of Bishop's Stortford to the west. In 2006 there were just under 207,000 movements handling approximately 23.7 million passengers.

- 2.1.2 The layout of the runways and taxiways is displayed in Figure 1.

## 3 Measures To Reduce Aircraft Noise Currently in Place

### 3.1 Land use planning

- 3.1.1 The Government's policies are set out in planning policy guidance (PPG) notes. Local authorities must take their content into account in preparing their development plans. PPG24<sup>3</sup> gives advice on how the planning system can be used to minimise the adverse effects of noise. When assessing a proposal for residential development near a source of noise, local planning authorities should determine into which of the four noise exposure categories (NECs) the proposed site falls, taking account of both day and night-time noise. The NEC categories are as follows:

#### NEC

- A Noise need not be considered as a determining factor in granting planning permission, although the noise level at the high end of the category should not be regarded as a desirable level.
- B Noise should be taken into account when determining planning applications and, where appropriate, conditions imposed to ensure an adequate level of protection against noise.
- C Planning permission should not normally be granted. Where it is considered that permission should be given, for example because there are no quieter alternative sites available, conditions should be imposed to ensure a commensurate level of protection against noise.
- D Planning permission should normally be refused.

---

<sup>3</sup> Planning Policy Guidance 24: Planning and Noise published September 1994

- 3.1.2 The recommended Noise Exposure Categories for new dwellings near existing noise sources are given below:

**Noise levels<sup>1</sup> corresponding to the noise exposure categories for new dwellings Leq dB**

Noise source	Noise exposure category			
	A	B	C	D
Road traffic				
0700 – 2300	<55	55 – 63	63 – 72	>72
2300 – 0700 <sup>2</sup>	<45	45 – 57	57 – 66	>66
Rail traffic				
0700 – 2300	<55	55 – 66	66 – 74	>74
2300 – 0700	<45	45 – 59	59 – 66	>66
Air traffic <sup>3</sup>				
0700 – 2300	<57	57 – 66	66 – 72	>72
2300 – 0700	<48	48 – 57	57 – 66	>66
Mixed sources <sup>4</sup>				
0700 – 2300	<55	55 – 63	63 – 72	>72
2300 – 0700	<45	45 – 57	57 – 66	>66

<sup>1</sup> Noise levels: the noise level(s) ( $L_{Aeq,T}$ ) used when deciding the NEC of a site should be representative of typical conditions.

<sup>2</sup> Night time noise levels (2300 – 0700): sites where individual noise events regularly exceed 82 dB  $L_{max}$  (S time weighting) several times in any hour should be treated as being in NEC C, regardless of the  $L_{Aeq,8hr}$  (except where the  $L_{Aeq,8hr}$  already puts the site in NEC D).

<sup>3</sup> Aircraft noise: daytime values accord with the contour values adopted by the Department for Transport which relate to levels measured 1.2 metres above open ground. For the same amount of noise energy, contour values can be up to 2 dBA higher than those of other sources because of ground reflection effects.

<sup>4</sup> Mixed sources: this refers to any combination of road, rail, air and industrial noise sources. The 'mixed source' values are based on the lowest numerical values of the single source limits in the table. The 'mixed source' NECs should only be used where no individual noise source is dominant.

### 3.2 Noise Insulation Schemes

- 3.2.1 The airport operator ran a voluntary insulation scheme in 1991–1993. The arrangements were reviewed and proposals for further schemes published for consultation by the airport operator in 2003. This was in response to a commitment in the 1991 scheme to review the programme when the actual noise climate associated with Stansted operating at 8 million passengers per annum (mppa) was known and for a further scheme related to 15mppa. The proposals in the consultation document were confirmed in December 2003. The boundary calculation for noise insulation in the 15mppa programme is defined by the 66 dBA Leq

(16 hour) daytime and 57 dBA Leq (eight hour) night-time contours and the 90 dBA SEL footprint for an average worst QC/2 aircraft. Ground noise is also taken into account.

### **3.3 Noise Insulation Commitments from the Air Transport White Paper**

3.3.1 The Air Transport White Paper<sup>4</sup> stated that in addition to controlling and reducing aircraft noise impacts, a proportion of the large economic benefits provided by airport development should be used to mitigate their local impacts. Airport operators are expected to implement proposals for noise insulation to those properties which suffer a medium to high level of noise (more than 63 dBA) and a large increase (3 dBA) in noise in 2006, compared with 2002. This applies to the summer 16 hour daytime noise contour.

### **3.4 Operational procedures and operating restrictions**

3.4.1 Full details are set out in statutory notices and published in the UK AIP (Aeronautical Information Package)<sup>5</sup> and elsewhere as appropriate. The following extracts contain provisions which apply at night.

#### *3.4.2 General (Heathrow, Gatwick and Stansted)*

After take-off the aircraft shall be operated in such a way that it is at a height of not less than 1000 ft aal (above aerodrome level) at 6.5 km from the start of roll as measured along the departure track of that aircraft. To minimise disturbance in areas adjacent to the aerodrome, commanders of aircraft are requested to avoid the use of reverse thrust after landing, consistent with the safe operation of the aircraft, between 2330 and 0600 (local time).

#### *3.4.3 Gatwick and Stansted*

Between the hours of 2330 (local) and 0600 (local), inbound aircraft, whether or not making use of the ILS (Instrument Landing System) localiser and irrespective of weight or type of approach, shall not join the centre-line below 3000 ft closer than 10 nm (nautical miles) from touchdown.

#### *3.4.4 Stansted specific*

Aircraft using Stansted airport shall avoid flying over Bishop's Stortford and shall avoid flying over Sawbridgeworth and Stansted Mountfitchet at an altitude of less than 2500 ft and shall avoid flying over St Elizabeth's Home at an altitude of less than 4000 ft.

#### *3.4.5 Continuous descent approach (CDA)*

A voluntary code of practice is in place which was compiled by a group representing airlines, NATS, Civil Aviation Authority, airports and the Department for Transport, Local Government and the Regions (DTLR) (now DfT), and is primarily concerned with Heathrow, Gatwick and Stansted airports.

---

<sup>4</sup> DfT, The Future of Air Transport, December 2003, Cm 6046

<sup>5</sup> Section AD2-EGSS-1-11 to 13.

The code encourages air traffic controllers and pilots to seek to facilitate a continuous descent approach in the descent from 6000ft. This is an effective technique for reducing arrivals noise. The following is an extract from the UK AIP instructing pilots to use CDA wherever possible. The full text can be found in the AIP and in the arrivals code of practice on the DfT website<sup>6</sup>.

“Where the aircraft is approaching the aerodrome to land (runway 23 only at Stansted) it shall commensurate with its ATC clearance minimise noise disturbance by the use of continuous descent and low power, low drag operating procedures (referred to in Detailed Procedures for descent clearance in AD 2-EGSS-1-13 of the UK AIP). Where the use of the procedures is not practicable, the aircraft shall maintain as high an altitude as possible.”

Stansted, along with Heathrow and Gatwick airports have developed a common working definition for monitoring CDAs as follows:

‘For monitoring purposes, a descent will be deemed to have been continuous provided that no segment of level flight longer than 2.5 nm occurs below 6000 ft QNH and ‘level flight’ is interpreted as any segment of flight having a height change of not more than 50 ft over a track distance of 2 nm or more, as recorded in the airport Noise and Track-keeping system.’

The CDA compliance levels are regularly reported back to the airports’ noise and track keeping working groups and consultative committees as well as the Flight Operations Performance Committee (FLOPC), which includes airline and ATC representatives.

### **3.5 Night restrictions**

#### **3.5.1 *Current night restrictions regime***

The current night restrictions regime was introduced in 2006<sup>7</sup> following extensive consultation. The restrictions are set by the DfT and are detailed in a statutory notice, published each season in the supplement to the UK AIP.

#### **3.5.2 *Night Period and Night Quota Period***

The ‘night period’ is 2300 – 0700 hours (local time) during which period the noisiest types of aircraft classified QC/8 and QC/16 may not be scheduled to land or take-off. From 2330 to 0600, the ‘night quota period’, aircraft movements are restricted by movements limits with noise quotas as a supplementary measure. These are set for each season.

---

<sup>6</sup> <http://www.dft.gov.uk/pgr/aviation/environmentalissues/arrivalscodeofpractice/>

<sup>7</sup> House of Commons *Official Report* 6 June 2006 cols 25WS.

### 3.5.3. *The Quota Count System*

Aircraft are assigned quota count (QC) classifications as follows:

<b>Certified noise level (EPNdB)</b>	<b>Quota count</b>
More than 101.9	QC/16
99 – 101.9	QC/8
96 – 98.9	QC/4
93 – 95.9	QC/2
90 – 92.9	QC/1
87 – 89.9	QC/0.5
84 – 86.9	QC/0.25

and are classified separately for take-off and landing. Schedules showing the QC classification of individual aircraft are published as part of the statutory notice.

#### *Exempt aircraft*

Jet aircraft and propeller aircraft are exempt from the movements limits and noise quotas if their noise certification data are less than 84 EPNdB.

### 3.5.4. *Movements limits and Noise Quotas at Stansted*

The movements limits and noise quotas for current and future years/seasons are:

	<b>Winter</b>						
	<b>2005/06</b>	<b>2006/07</b>	<b>2007/08</b>	<b>2008/09</b>	<b>2009/10</b>	<b>2010/11</b>	<b>2011/12</b>
Movement limit	5000	5000	5000	5000	5000	5000	5000
Noise quota	3550	3510	3470	3430	3390	3350	3310

	<b>Summer</b>						
	<b>2006</b>	<b>2007</b>	<b>2008</b>	<b>2009</b>	<b>2010</b>	<b>2011</b>	<b>2012</b>
Movement limit	7000	7000	7000	7000	7000	7000	7000
Noise quota	4950	4900	4850	4800	4750	4700	4650

#### *Seasons*

The summer season is the period of British Summer Time in any one year as fixed by or under the Summer Time Act 1972 as amended by S.I. 2002/262; the winter season is the period between the end of British Summer Time in one year and the start of British Summer Time in the next. The change to British Summer Time occurs at 0100 Greenwich Mean Time (Universal Co-ordinated Time).

### 3.5.5. *End of season flexibility*

The normal flexibility margin is 10%; i.e. up to 10% of the current season's movements limit may be carried over if sufficient amount of the limit is unused, and up to 10% of the next season's movements limit may be anticipated in the event of an overrun. Any excess overrun is penalised in the following season at double the amount of the excess. The same arrangements apply to the noise quotas.

### 3.5.6. *Permitted operations*

- (1) any aircraft which has a quota count of 4, 8, or 16 may not be scheduled to take off or land during the night quota period;
- (2) any aircraft which has a quota count of 8 or 16 may not be scheduled to take off or land during the night period;
- (3) any aircraft which has a quota count of 8 or 16 may not take off in the night period, except in the period 2300 hours to 2330 hours in circumstances where:
  - (a) it was scheduled to take off prior to 2300 hours;
  - (b) the take-off was delayed for reasons beyond the control of the aircraft operator; and
  - (c) the airport authority has not given notice to the aircraft operator precluding take-off.

### 3.5.7 *Dispensations*

The Secretary of State has the power to specify circumstances in which movements may be disregarded from the night restrictions by the airport managers and the power to authorise that specific flights should be disregarded. The airport companies may disregard night movements in the following exceptional circumstances:

- delays to aircraft which are likely to lead to serious congestion at the aerodrome or serious hardship or suffering to passengers or animals
- delays to aircraft resulting from widespread and prolonged disruption of air traffic.

### 3.5.8 *Monitoring*

Stansted airport provides to its Airport Consultative Committees and to the Department regular reports in a format advised by The Aircraft Noise Monitoring Advisory Committee (ANMAC) on usage of the movements limits and the noise quotas, details of any dispensations or exemptions granted, and reports on any movements by QC/8 and QC/16 aircraft during the night period. In addition, under section 78(4) of the 1982 Civil Aviation Act 1982 all dispensations granted by the airports have to be reported to the Department in writing within a maximum of one week from when the dispensed flight took place.



### **3.6 Noise preferential routeing**

- 3.6.1 Aircraft departing Stansted are required to follow specific paths called noise preferential routes (NPRs) unless directed otherwise by air traffic control (ATC). NPRs were designed to avoid overflight of built-up areas where possible. They lead from the take-off runway to the main UK air traffic routes, and form the first part of the Standard Instrument Departure routes (SIDs). Associated with each NPR is a swathe extending 1.5 km each side of the nominal NPR centre line, within which aircraft are considered to be flying on track. This takes account of various factors that affect track-keeping including tolerances in navigational equipment, type and weight of aircraft, and weather conditions – particularly winds that may cause drifting when aircraft are turning. Aircraft reaching 4000 ft (3000 ft for the Buzad departure routes in the period 0600-2330) at any point along an NPR may be turned off the route by ATC onto more direct headings to their destinations – a practice known as ‘vectoring’. ATC may also vector aircraft from NPRs below this altitude for safety reasons, including in certain weather conditions, for example to avoid storms.
- 3.6.2 Aircraft operators responsible for flagrant or persistent track deviations are fined by BAA Stansted, with the money donated to local community projects.
- 3.6.3 Changes in the NPR structure are rare and stability is regarded as important, so that people may know where aircraft noise will be experienced. The frequency with which any particular NPR is used will vary, and is an operational decision for ATC, taking account of the final destination of individual flights, together with other considerations such as overall air traffic and weather conditions, both locally and along intended routes.

### **3.7 Noise limits**

- 3.7.1 During the night quota period (2330-0600) the departure noise limit is 87 dBA L<sub>max</sub>. During the remainder of the night period (2300-2330 and 0600-0700) the noise limit is 89 dBA. The limits apply at fixed noise monitors (see para 3.8.1 below). These night time limits are consistent with the night restrictions regime. (There is also a daytime noise limit of 94 dBA).
- 3.7.2 Airlines whose aircraft breach the noise limits are fined by BAA, with the money donated to local community projects.
- 3.7.3 There are no arrivals noise limits. A report which considered the feasibility of setting noise limits for arriving aircraft, *‘Noise from Arriving Aircraft: Final Report of the ANMAC Technical Working Group’*, was published in 1999. In light of the findings, the then Aviation Minister, decided against imposing operational noise limits for arriving aircraft. A code of practice has been developed (described above) for night time (and day time) arrivals.

### **3.8 Noise monitoring**

- 3.8.1 Most large airports have noise and track-keeping (NTK) systems, which take radar data from air traffic control radars and combine it with flight information such as callsign, tail number, type and destination. At Heathrow, Gatwick and Stansted airports the noise and track-keeping (NTK) system captures data from both fixed and mobile noise monitors around the airports, to be matched to operational data. This information ensures that the ANCON noise model database is kept up to date which in turn is used as an input to the annual noise contours for each of the three airports.

- 3.8.2 Fixed noise monitors at the three airports are located at approximately 6.5 km from start-of-roll (SOR). This corresponds to the flyover measurement point in the ICAO Annex 16 noise certification procedure. There are 8 fixed monitors around Stansted. The location of the monitors takes account of the noise preferential routes.
- 3.8.3 The location and distance of the fixed noise monitors were decided in 2000<sup>8</sup> after consultation. Relating the noise limits to a reference distance 6.5 km from start-of-roll encourages aircraft operators to gain height as quickly as possible and then reduce engine power and noise at the earliest opportunity. There is also a requirement for departing aircraft to attain at least a 1000 feet altitude when passing the fixed noise monitors. This point was also chosen as few residential areas lay closer to major airports than that and this would result in a noise benefit for residents who live further out from the airport.
- 3.8.4 In addition, aircraft are required, after take-off, to be operated in such a way that it will not cause more than 89 dBA L<sub>max</sub> by night (from 2300-0700 hours local time) and that it will not cause more than 87 dBA L<sub>max</sub> during the night quota period (2330-0600 hours local time) as measured at any noise terminal at any of the sites referred to in the AIP<sup>9</sup>.

### 3.9 Noise charges

3.9.1 Conditions of use and airport charges for Stansted<sup>10</sup> are published every year by BAA. The charge on landing is assessed and paid on the basis of the Maximum Total Weight Authorised (MTWA) as recorded by the airport companies on 1 April each year.

#### 3.9.2 *Summary of charges*

- The base charges on landing apply to jet aircraft over 16 metric tonnes which meet the noise certification standards of ICAO Annex 16 Chapter 3. Non-jet aircraft and all aircraft not exceeding 16 metric tonnes automatically qualify for the base charges.
- The Chapter 3 base charge on landing is increased to three times for aircraft failing to meet Chapter 3 noise certification standards.
- A Chapter 3 minus or Chapter 4 charge applies to those jet and non-jet aircraft in excess of 16 metric tonnes which, on both arrival and departure, have a quota count of 0.5 or 1, or are exempt.
- Aircraft deemed to be marginally compliant Chapter 3 aircraft (noise performance is 5 or more EPNdB below Chapter 3 certification limits) are subject to a weight charge on landing of 150% of the Chapter 3 base charges.
- Landing charges at Heathrow, Gatwick and Stansted are increased during daytime peak periods. At Heathrow, the peak charge also applies during the following

---

<sup>8</sup> House of Commons *Official Report* 18 December 2000 cols 11W-12W.

<sup>9</sup> Section AD2-EGSS-1-11.

<sup>10</sup> Stansted Conditions of use

periods: 2300-0459 UTC (GMT), 1 April to 31 October and 0000-0559 UTC (GMT), 1 November to 31 March. Between 0000-0329 UTC (GMT), 1 April to 31 October and 0100-0429 UTC (GMT), 1 November to 31 March the charge is peak x 1.5.

## **4 Aircraft Operations**

### **4.1 Flight Tracks**

- 4.1.1 The flight tracks and track dispersions used for all the 2006 strategic noise mapping contours were the same as those used for the 2006 average summer 16-hour day Leq contours.
- 4.1.2 These were determined from radar data extracted from the airport's Noise and Track Keeping (NTK) monitoring system for the summer of 2006 and defined mean tracks and track dispersions for all outbound routes from Runways 23 and 05 (see Figure 2 for route designations).
- 4.1.3 In the summer of 2006, radar measurements of arrival tracks between the stacks and Runways 23 and 05 confirmed that the continued use of evenly spaced 'spurs' remained a realistic method for modelling the dispersion of arrival tracks about the extended runway centre lines. The majority of aircraft joined the centre lines at distances greater than 9 km from threshold – only a very small number joined at shorter distances.

### **4.2 Flight Profiles and Noise Emissions**

- 4.2.1 As for the flight tracks, the flight profiles and noise emission data used for the strategic noise mapping contours were the same as those used for the 2006 average summer 16-hour day Leq contours.
- 4.2.2 The average flight profiles of height and speed versus track distance for each aircraft type during the summer months of 2006 were reviewed, and updated where necessary, for both departures and arrivals. Noise event levels were then determined from a database expressing SEL<sup>11</sup> as a function of engine power setting and slant distance to the receiver – the so-called 'noise-power-distance (NPD)' relationship. The engine power settings required for the aircraft to follow the measured average height and speed profiles were calculated from data describing aircraft performance characteristics within each of the different aircraft type categories.

### **4.3 Traffic Distribution by Aircraft Type and Route**

- 4.3.1 The traffic data required for the strategic noise mapping contours relates to an average 12-hour day (0700 to 1900 local time), an average 4-hour evening (1900 to 2300 local time) and an average 8-hour night (2300 to 0700 local time) over the entire year. Tables 1, 2 and 3 display the distribution of departures and arrivals by ANCON type for the three time periods based on the entire year.
- 4.3.2 Table 4 displays the distribution of aircraft departures by route for the day, evening and night periods during 2006.

---

<sup>11</sup> Sound Exposure Level in dBA; a measure of noise event level which accounts for both the duration and intensity of noise.

- 4.3.3 There was some disruption during the 2006 night period at Stansted. From February to November 2006 runway resurfacing took place at Stansted which affected the mode of arrival operation by introducing, for some time periods, displaced thresholds and 3.5 degree glide slopes (more details can be found in the UK AIP S3/2006 dated 17 January 2006). An analysis of the 2006 Stansted radar data during the night period has shown that only 0.4% of the total arrivals to Runway 23 utilised a 3.5 degree glide slope and displaced threshold. The corresponding percentage for arrivals to Runway 05 was 3.9%. As the numbers were so low and would have very little effect on the contours, it was decided to model all of the night arrivals at Stansted using the 'normal' daytime 3 degree approach profiles and thresholds. The 2006 Stansted night contours are, therefore, very slightly pessimistic, but do reflect more closely what the night exposure would have been for 'normal' operations.

## 5 Noise Contours

### 5.1 12-hour day $L_{day}$

- 5.1.1 The annual 12 hour (0700 – 1900 LT)  $L_{day}$  contours from 55 dBA to 75 dBA in 5 dB steps are displayed in Figure 3. The percentages of use of each runway direction – the 'modal split'- for this time period were 66% south west – 34% north east. The estimated areas, populations<sup>12</sup> and households within the annual 12 hour  $L_{day}$  contours are shown in Table 5(a). **Note that all the results presented here are by contour bands (as required by the Directive) and are not cumulative as is the case for the historical summer 16 hour day  $L_{eq}$  contours.**

### 5.2 4 hour evening $L_{evening}$

- 5.2.1 The annual 4 hour (1900 – 2300 LT)  $L_{evening}$  contours from 55 dBA to 75 dBA in 5 dB steps are displayed in Figure 4. The percentages of use of each runway direction – the 'modal split'- for this time period were 66% south west – 34% north east. The estimated areas, populations and households within the annual 4 hour evening  $L_{evening}$  contours are shown in Table 5(b).

### 5.3 8 hour night $L_{night}$

- 5.3.1 The annual 8 hour (2300 – 0700 LT)  $L_{night}$  contours from 50 dBA to 70 dBA in 5 dB steps are displayed in Figure 5. The percentages of use of each runway direction – the 'modal split'- for this time period were 66% south west – 34% north east. The estimated areas, populations and households within the annual 8 hour night  $L_{night}$  contours are shown in Table 5(c).

### 5.4 16 hour day $L_{Aeq,16hr}$

- 5.4.1 The annual 16 hour (0700 – 2300 LT) annual  $L_{Aeq,16hr}$  contours from 55 dBA to 75 dBA in 5 dB steps are displayed in Figure 6. The percentages of use of each runway direction – the 'modal split'- for this time period were 66% south west – 34% north east. The estimated areas, populations and households within the annual 16 hour day  $L_{Aeq,16hr}$  contours are shown in Table 5(d).

<sup>12</sup> The population and household estimates shown in this Report are based on 2001 census data updated by CACI Ltd in 2005.

## **5.5 24 hour $L_{den}$**

- 5.5.1 The annual 24 hour  $L_{den}$  contours from 55 dBA to 75 dBA in 5 dB steps are displayed in Figure 7. The percentages of use of each runway direction – the ‘modal split’- for this time period were 66% south west – 34% north east. The estimated areas, populations and households within the annual 24 hour day  $L_{den}$  contours are shown in Table 5(e).

## References

- 1 Critchley J B, Ollerhead J B  
The Use of Leq as an Aircraft Noise Index  
DORA Report 9023, September 1990
- 2 Ollerhead J B  
The CAA Aircraft Noise Contour Model: ANCON Version 1  
DORA Report 9120, November 1992
- 3 Ollerhead J B, Rhodes D P, Viinikainen M S, Monkman D J, Woodley A C  
The UK Civil Aircraft Noise Contour Model ANCON:  
Improvements in Version 2  
R&D Report 9842, June 1999
- 4 Rhodes D P, Monkman D J, Woodley A C  
The CAA Aircraft Noise Contour Model: ANCON Version 2.3  
ERCD Report 0606 (to be published shortly)
- 5 Monkman D J, Rhodes D P, Deeley J, Beaton D, McMahon J  
Noise Exposure Contours for Stansted Airport 2006  
ERCD Report 0703, June 2007

**TABLE 1: DISTRIBUTION OF STANSTED AVERAGE DAILY AIRCRAFT MOVEMENTS BY ANCON TYPE (ANNUAL 12 HOUR DAY 0700-1900 LOCAL TIME)**

ANCON Type	Departures	Arrivals	Movements*
B707C3	0.02	0.01	<b>0.03</b>
B727C3	0.12	0.11	<b>0.22</b>
B732C3	0.35	0.26	<b>0.61</b>
B733	11.41	12.56	<b>23.97</b>
B736	15.40	12.69	<b>28.09</b>
B738	104.25	92.49	<b>196.74</b>
B742C3	0.44	0.49	<b>0.94</b>
B744G	1.50	1.64	<b>3.14</b>
B744P	0.04	0.04	<b>0.08</b>
B744R	0.01	0.01	<b>0.01</b>
B747SP	0.04	0.05	<b>0.09</b>
B757C	0.05	0.05	<b>0.11</b>
B757E	2.37	1.40	<b>3.77</b>
B757P	1.06	1.27	<b>2.32</b>
B762	1.34	1.16	<b>2.50</b>
B763G	0.25	0.28	<b>0.54</b>
B763P	0.03	0.03	<b>0.07</b>
B772G	0.04	0.05	<b>0.08</b>
B772R	0.00	0.00	<b>0.01</b>
BA46	2.05	1.96	<b>4.01</b>
CRJ	0.06	0.05	<b>0.11</b>
CRJ900	0.02	0.01	<b>0.03</b>
DC10	0.01	0.01	<b>0.02</b>
DC87	0.04	0.04	<b>0.09</b>
DC9C3	0.02	0.01	<b>0.03</b>
EA30	0.10	0.05	<b>0.15</b>
EA31	0.31	0.30	<b>0.61</b>
EA319C	35.83	29.01	<b>64.83</b>
EA319V	0.35	0.30	<b>0.65</b>
EA320C	1.86	1.24	<b>3.10</b>
EA320V	0.76	0.77	<b>1.54</b>
EA321C	1.76	1.29	<b>3.05</b>
EA321V	0.12	0.12	<b>0.24</b>
EA33	0.01	0.02	<b>0.03</b>
EA34	0.01	0.01	<b>0.02</b>
EA346	0.00	0.01	<b>0.01</b>
ERJ	0.71	0.47	<b>1.18</b>
EXE2	0.05	0.05	<b>0.10</b>
EXE3	5.08	4.08	<b>9.16</b>
FK10	4.20	2.84	<b>7.04</b>
L101	0.00	0.01	<b>0.01</b>
L4P	0.04	0.03	<b>0.07</b>
LTT	3.43	3.93	<b>7.36</b>
MD11	1.26	1.79	<b>3.04</b>
MD80	0.71	0.64	<b>1.35</b>
MD90	0.68	0.89	<b>1.56</b>
SP	0.03	0.04	<b>0.07</b>
STP	0.07	0.07	<b>0.14</b>
STT	0.12	0.15	<b>0.27</b>
TU54	0.01	0.03	<b>0.04</b>
<b>Totals*</b>	<b>198.42</b>	<b>174.82</b>	<b>373.24</b>

\*Totals may not sum exactly due to rounding.

**TABLE 2: DISTRIBUTION OF STANSTED AVERAGE DAILY AIRCRAFT MOVEMENTS BY ANCON TYPE (ANNUAL 4 HOUR EVENING 1900-2300 LOCAL TIME)**

<b>ANCON Type</b>	<b>Departures</b>	<b>Arrivals</b>	<b>Movements*</b>
B707C3	0.00	0.01	<b>0.01</b>
B727C3	0.02	0.02	<b>0.04</b>
B732C3	0.02	0.08	<b>0.10</b>
B733	5.22	4.43	<b>9.65</b>
B736	5.63	5.43	<b>11.06</b>
B738	23.32	29.40	<b>52.72</b>
B742C3	0.13	0.08	<b>0.21</b>
B744G	0.55	0.22	<b>0.77</b>
B744P	0.00	0.02	<b>0.02</b>
B744R	0.00	0.04	<b>0.04</b>
B747SP	0.01	0.00	<b>0.02</b>
B757C	0.00	0.00	<b>0.01</b>
B757E	0.24	1.18	<b>1.42</b>
B757P	0.27	0.04	<b>0.31</b>
B762	0.04	0.04	<b>0.08</b>
B763G	0.95	0.69	<b>1.64</b>
B763P	0.01	0.01	<b>0.02</b>
B772G	0.02	0.01	<b>0.04</b>
BA46	1.24	0.78	<b>2.02</b>
CRJ	0.01	0.01	<b>0.01</b>
CRJ900	0.00	0.01	<b>0.01</b>
DC87	0.00	0.00	<b>0.01</b>
DC9C3	0.00	0.02	<b>0.02</b>
EA30	0.73	0.82	<b>1.55</b>
EA31	0.02	0.03	<b>0.05</b>
EA319C	6.32	11.74	<b>18.06</b>
EA319V	0.13	0.14	<b>0.28</b>
EA320C	0.64	0.76	<b>1.40</b>
EA320V	0.04	0.04	<b>0.09</b>
EA321C	0.48	0.65	<b>1.13</b>
EA33	0.00	0.00	<b>0.00</b>
EA346	0.00	0.00	<b>0.00</b>
EA34	0.00	0.00	<b>0.00</b>
ERJ	0.11	0.24	<b>0.35</b>
EXE2	0.01	0.01	<b>0.02</b>
EXE3	0.63	1.41	<b>2.04</b>
FK10	1.52	1.54	<b>3.06</b>
L101	0.00	0.01	<b>0.01</b>
L4P	0.02	0.15	<b>0.18</b>
LTT	1.51	1.22	<b>2.73</b>
MD11	1.09	0.56	<b>1.65</b>
MD80	0.26	0.31	<b>0.57</b>
MD90	0.88	0.69	<b>1.57</b>
SP	0.00	0.00	<b>0.01</b>
STP	0.02	0.02	<b>0.03</b>
STT	0.03	0.04	<b>0.07</b>
TU54	0.02	0.00	<b>0.02</b>
<b>Totals</b>	<b>52.16</b>	<b>62.93</b>	<b>115.10</b>

\*Totals may not sum exactly due to rounding.



**TABLE 3: DISTRIBUTION OF STANSTED AVERAGE DAILY AIRCRAFT MOVEMENTS BY ANCON TYPE (ANNUAL 8 HOUR NIGHT 2300-0700 LOCAL TIME)**

ANCON Type	Departures	Arrivals	Movements*
B727C3	0.02	0.02	<b>0.04</b>
B732C3	0.02	0.04	<b>0.06</b>
B733	2.80	2.45	<b>5.25</b>
B736	0.32	3.21	<b>3.53</b>
B738	15.78	21.26	<b>37.04</b>
B742C3	0.03	0.04	<b>0.07</b>
B744G	0.10	0.30	<b>0.40</b>
B744P	0.02	0.01	<b>0.03</b>
B744R	0.04	0.00	<b>0.04</b>
B747SP	0.00	0.01	<b>0.01</b>
B757C	0.17	0.16	<b>0.33</b>
B757E	0.84	0.86	<b>1.70</b>
B757P	0.02	0.03	<b>0.05</b>
B762	0.03	0.20	<b>0.23</b>
B763G	0.44	0.64	<b>1.08</b>
B763P	0.02	0.02	<b>0.04</b>
B772G	0.00	0.00	<b>0.00</b>
BA46	1.98	2.52	<b>4.50</b>
CRJ	0.01	0.01	<b>0.02</b>
DC10	0.00	0.00	<b>0.00</b>
DC87	0.00	0.00	<b>0.00</b>
DC9C3	0.00	0.00	<b>0.00</b>
EA30	1.39	1.35	<b>2.74</b>
EA31	0.05	0.05	<b>0.10</b>
EA319C	2.44	3.79	<b>6.23</b>
EA319V	0.02	0.05	<b>0.07</b>
EA320C	0.21	0.69	<b>0.90</b>
EA320V	0.03	0.02	<b>0.05</b>
EA321C	0.21	0.50	<b>0.71</b>
EA321V	0.01	0.01	<b>0.02</b>
EA33	0.00	0.00	<b>0.00</b>
EA34	0.00	0.00	<b>0.00</b>
ERJ	0.05	0.15	<b>0.20</b>
EXE2	0.01	0.01	<b>0.02</b>
EXE3	0.76	0.98	<b>1.74</b>
FK10	0.01	1.37	<b>1.38</b>
L101	0.01	0.00	<b>0.01</b>
L4P	0.23	0.11	<b>0.34</b>
LTT	1.57	1.38	<b>2.95</b>
MD11	0.30	0.29	<b>0.59</b>
MD80	0.16	0.18	<b>0.34</b>
MD90	0.02	0.00	<b>0.02</b>
SP	0.00	0.00	<b>0.00</b>
STP	0.01	0.02	<b>0.03</b>
STT	0.04	0.03	<b>0.07</b>
<b>Totals</b>	<b>30.19</b>	<b>42.74</b>	<b>72.92</b>

\*Totals may not sum exactly due to rounding.

**TABLE 4: PERCENTAGE OF STANSTED AVERAGE DEPARTURES BY ROUTE\*  
FOR DAY, EVENING AND NIGHT**

SOUTH WESTERLY DEPARTURE ROUTE	PERCENTAGE OF TOTAL DEPARTURES Annual 12 hour day 2006	PERCENTAGE OF TOTAL DEPARTURES Annual 4 hour evening 2006	PERCENTAGE OF TOTAL DEPARTURES Annual 8 hour night 2006
BUZ/BKY/CPT	34.5	28.4	36.8
CLN	16.4	23.0	14.4
DVR/LAM/LYD	15.1	14.6	14.8
PERCENTAGE SOUTH WEST	66.0	66.0	66.0
NORTH EASTERLY DEPARTURE ROUTE	PERCENTAGE OF TOTAL DEPARTURES Annual 12 hour day 2006	PERCENTAGE OF TOTAL DEPARTURES Annual 4 hour evening 2006	PERCENTAGE OF TOTAL DEPARTURES Annual 8 hour night 2006
BUZ/BKY/CPT	18.0	15.0	18.7
CLN	8.4	11.6	7.4
DVR/LAM/LYD	7.6	7.4	7.9
PERCENTAGE NORTH EAST	34.0	34.0	34.0

\* See Figure 2

**TABLE 5: STANSTED 2006 - AREAS, POPULATIONS AND HOUSEHOLDS WITHIN CONTOUR BANDS****(a) Average mode annual 12 hour day  $L_{day}$** 

Contour band (dBA)	Area (km <sup>2</sup> )	Population (000s)	Households (000s)
55 - 59.9	26.3	3.6	1.5
60 - 64.9	10.3	0.8	0.3
65 - 69.9	3.5	0.1	<0.1
70 - 74.9	1.0	<0.1	<0.1
>75	0.8	<0.1	<0.1

**(b) Average mode annual 4 hour evening  $L_{evening}$** 

Contour band (dBA)	Area (km <sup>2</sup> )	Population (000s)	Households (000s)
55 - 59.9	25.4	3.3	1.4
60 - 64.9	9.8	0.7	0.3
65 - 69.9	3.4	0.1	<0.1
70 - 74.9	1.0	<0.1	<0.1
>75	0.7	<0.1	<0.1

**(c) Average mode annual 8 hour  $L_{night}$** 

Contour band (dBA)	Area (km <sup>2</sup> )	Population (000s)	Households (000s)
50 - 54.9	24.7	3.2	1.4
55 - 59.9	9.7	0.8	0.3
60 - 64.9	3.3	0.1	<0.1
65 - 69.9	1.0	<0.1	<0.1
>70	0.7	<0.1	<0.1

**(d) Average mode annual 16 hour day  $L_{Aeq,16hr}$** 

Contour band (dBA)	Area (km <sup>2</sup> )	Population (000s)	Households (000s)
55 - 59.9	26.1	3.7	1.5
60 - 64.9	10.2	0.7	0.3
65 - 69.9	3.5	0.1	<0.1
70 - 74.9	1.0	<0.1	<0.1
>75	0.8	<0.1	<0.1

**(e) Average mode annual 24 hour  $L_{den}$** 

Contour band (dBA)	Area (km <sup>2</sup> )	Population (000s)	Households (000s)
55 - 59.9	44.9	7.8	3.2
60 - 64.9	18.2	1.7	0.7
65 - 69.9	6.7	0.3	0.1
70 - 74.9	2.2	<0.1	<0.1
>75	1.2	<0.1	<0.1

FIGURE 1: STANSTED AIRPORT RUNWAY LAYOUT



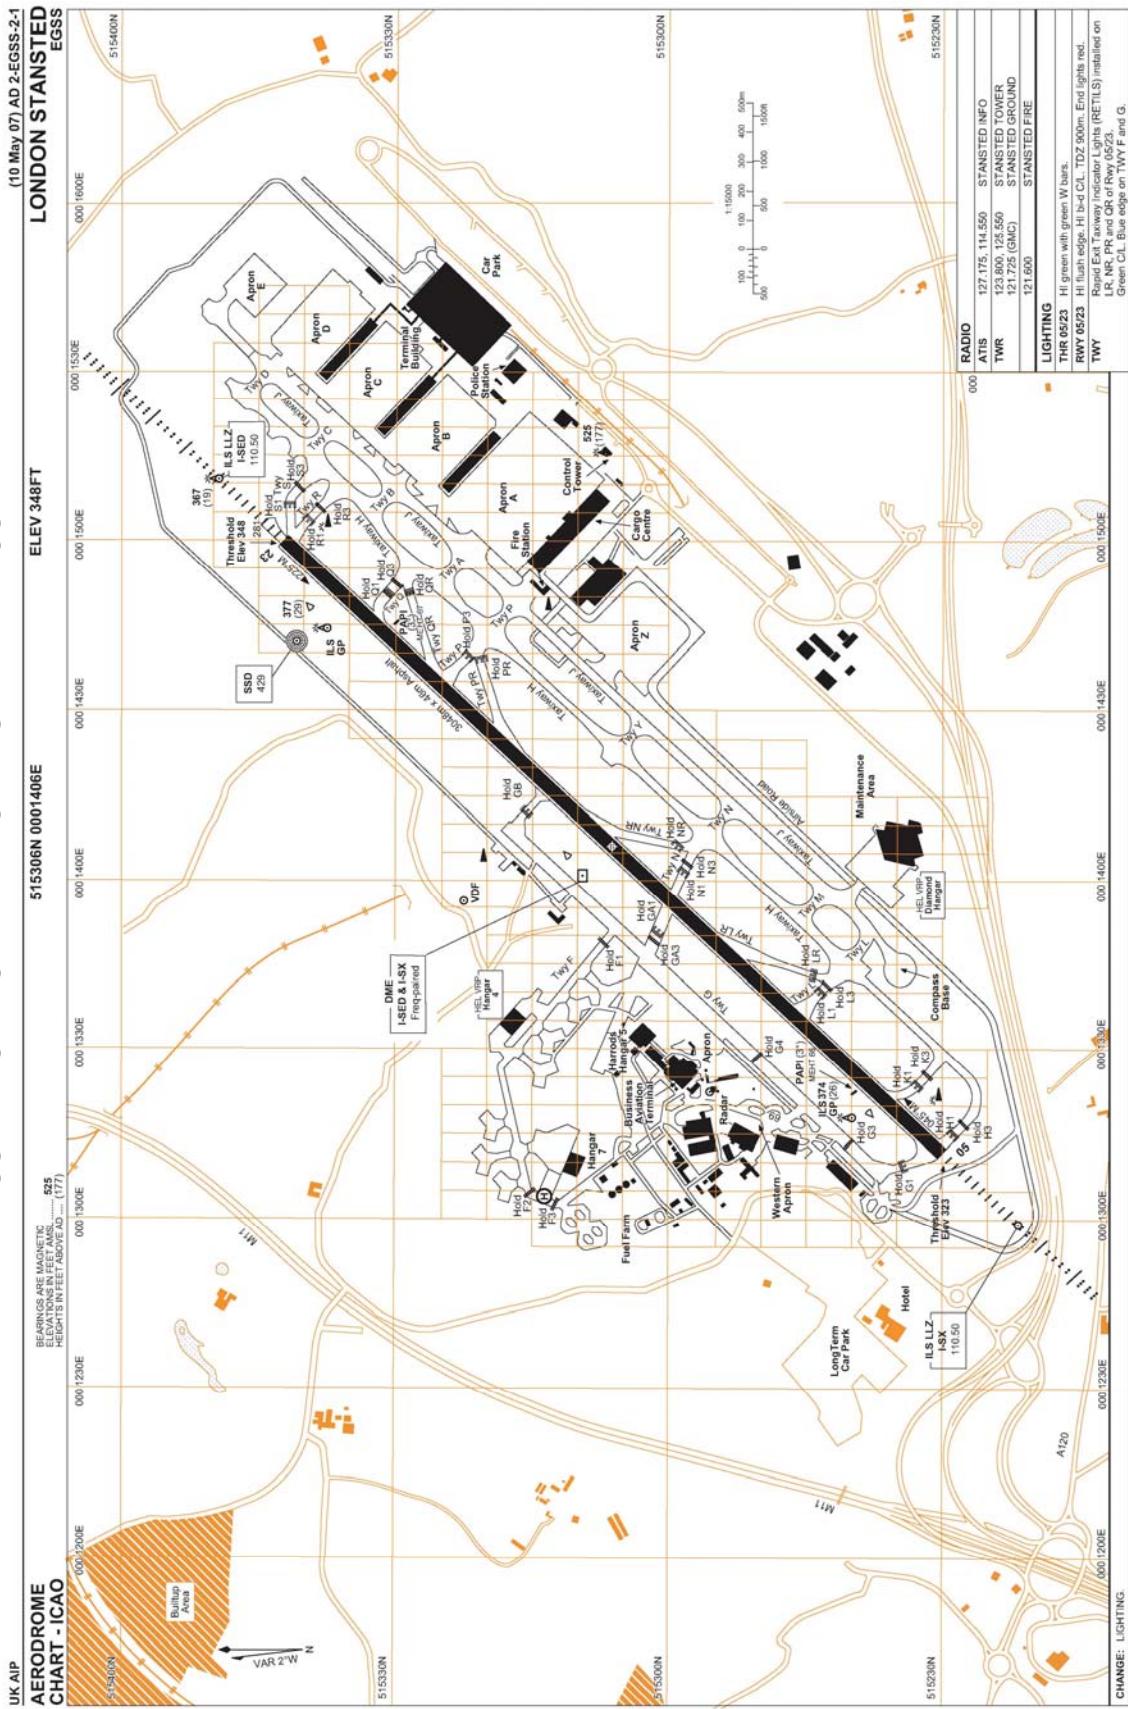


FIGURE 2: STANSTED AIRPORT STANDARD INSTRUMENT DEPARTURE ROUTES

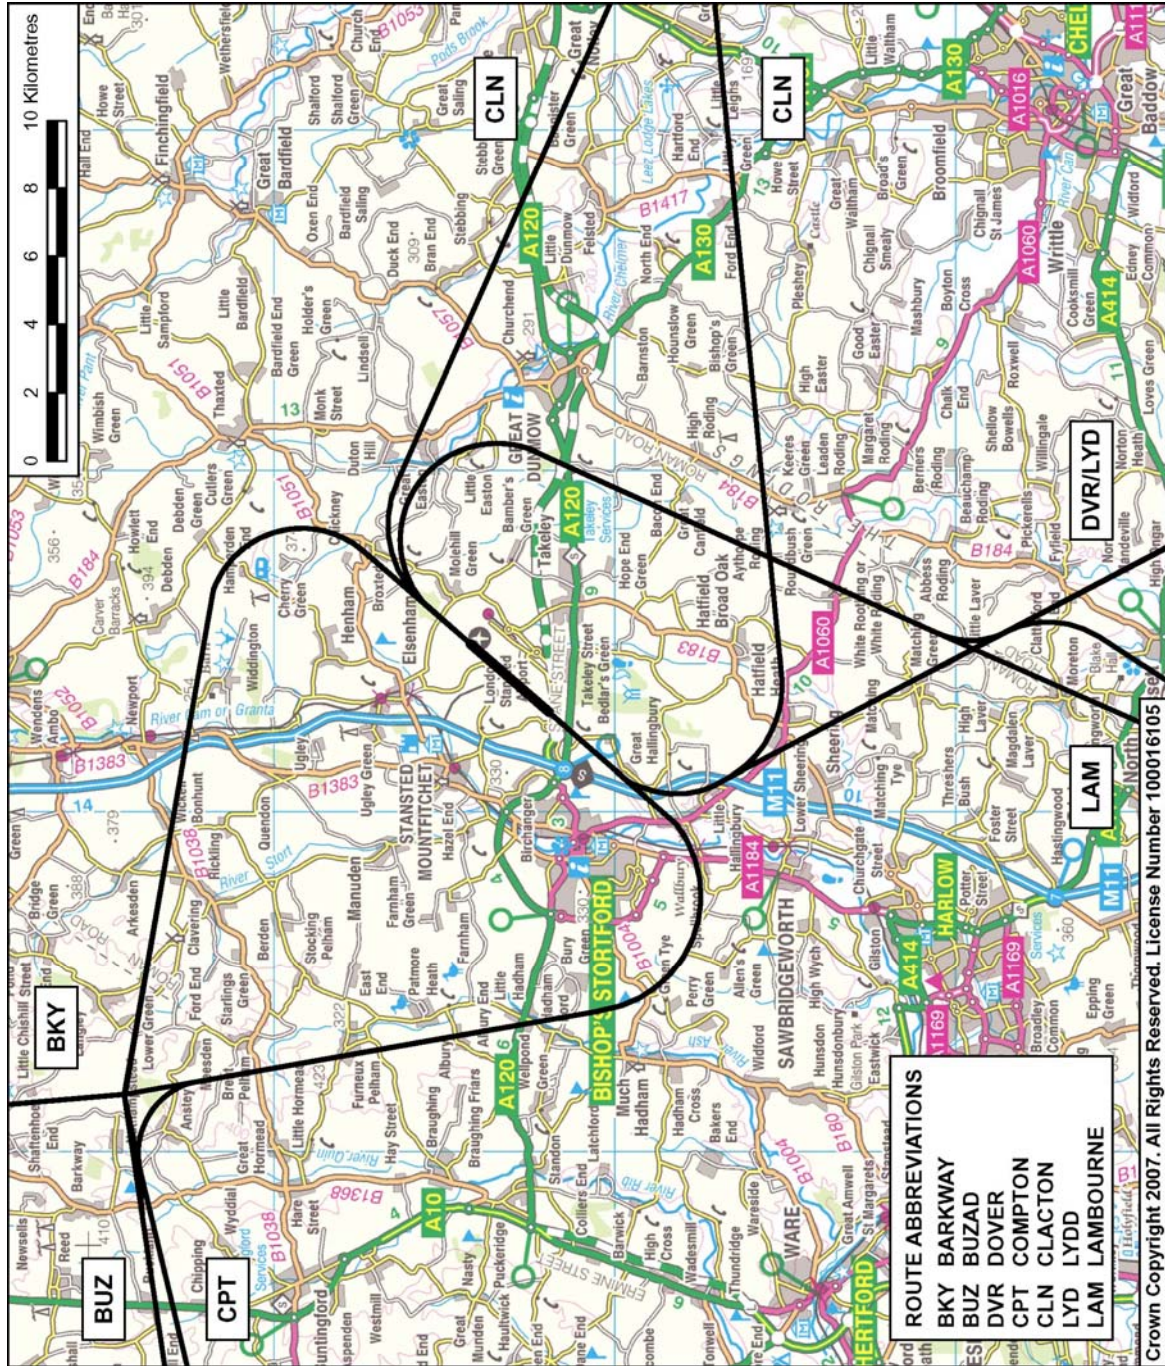


Crown Copyright 2007. All Rights Reserved. License Number 100016105


**FIGURE 3: STANSTED AIRPORT**  
**Year 2006 annual 12 hour L<sub>day</sub> terrain adjusted noise contours (0700-1900 LT)**  
**actual modal split 66% south west / 34% north east**

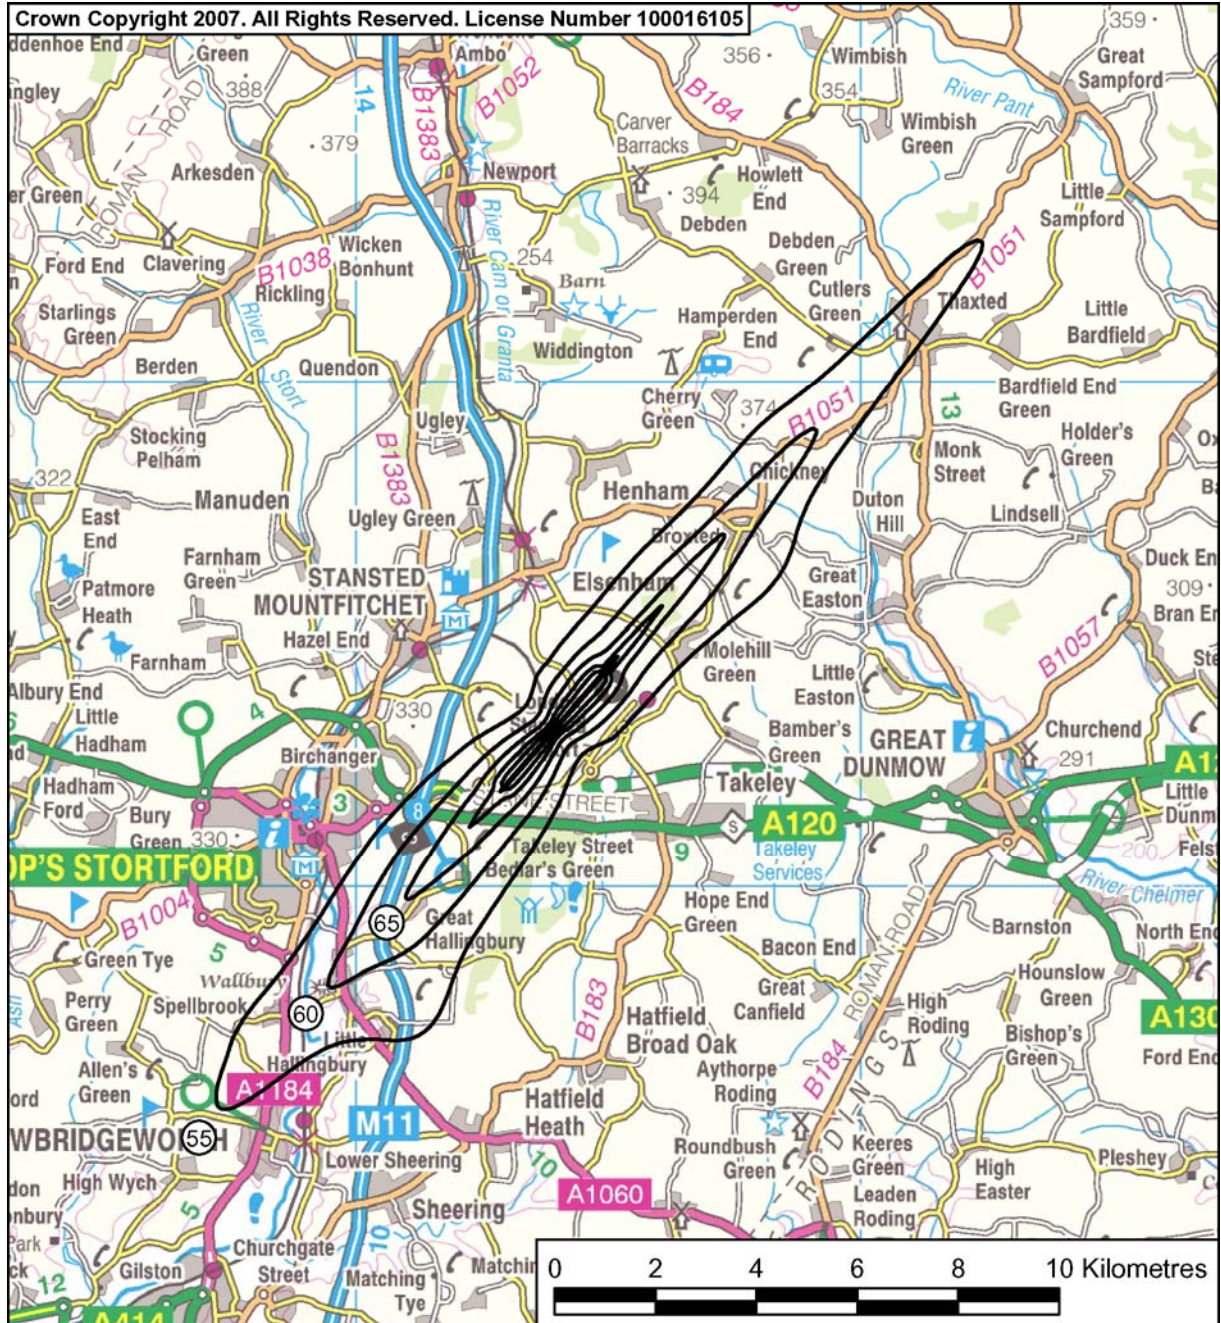

**FIGURE 4: STANSTED AIRPORT**  
**Year 2006 annual 4 hour L<sub>evening</sub> terrain adjusted noise contours (1900-2300 LT)**  
**actual modal split 66% south west / 34% north east**

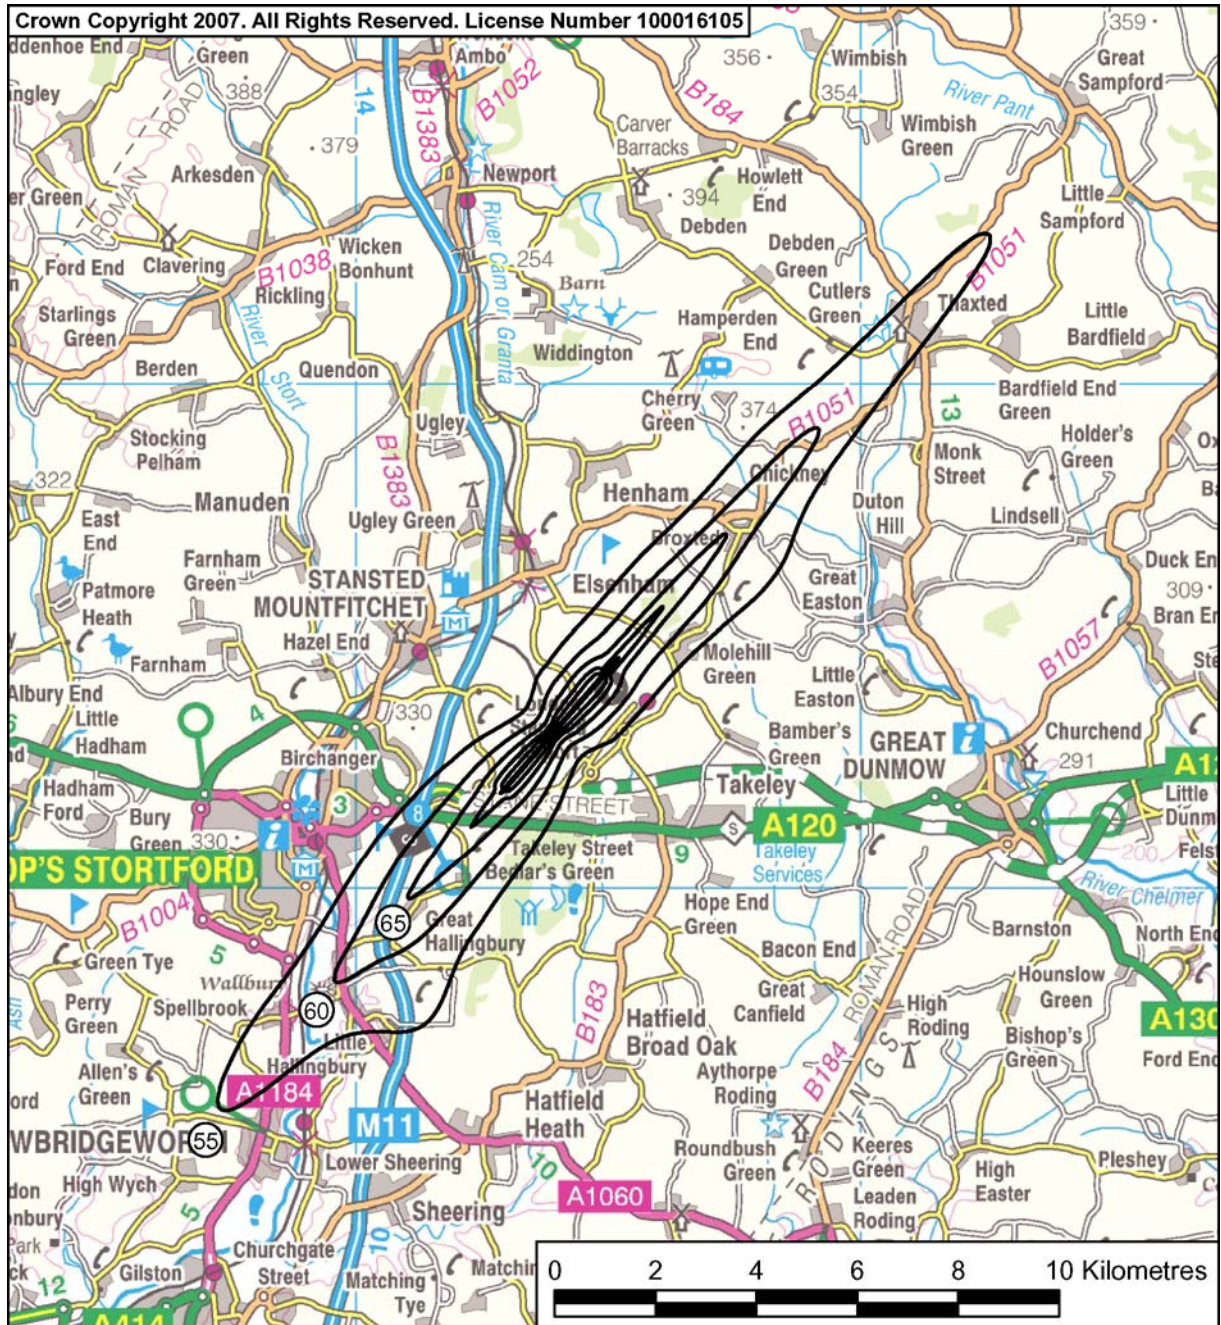


**FIGURE 5: STANSTED AIRPORT**  
**Year 2006 annual 8 hour  $L_{night}$  terrain adjusted noise contours (2300-0700 LT)**  
**actual modal split 66% south west / 34% north east**

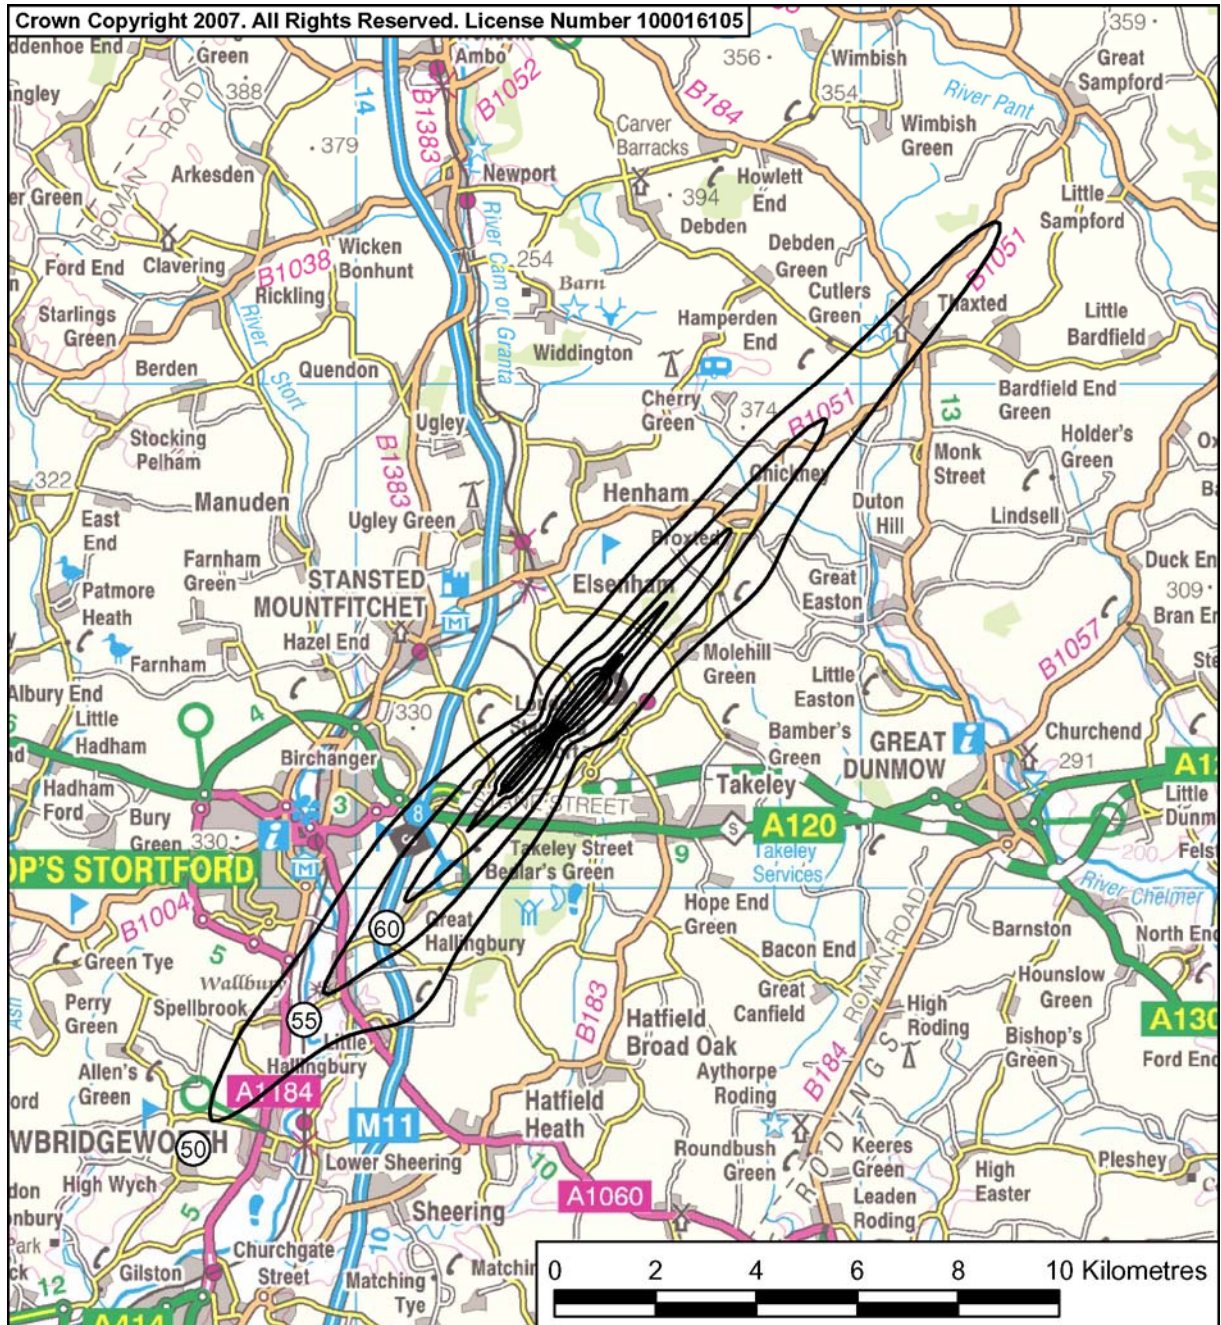




**FIGURE 6: STANSTED AIRPORT**  
**Year 2006 annual 16 hour day  $L_{Aeq,16hr}$  terrain adjusted noise contours (0700-2300 LT)**  
**actual modal split 66% south west / 34% north east**

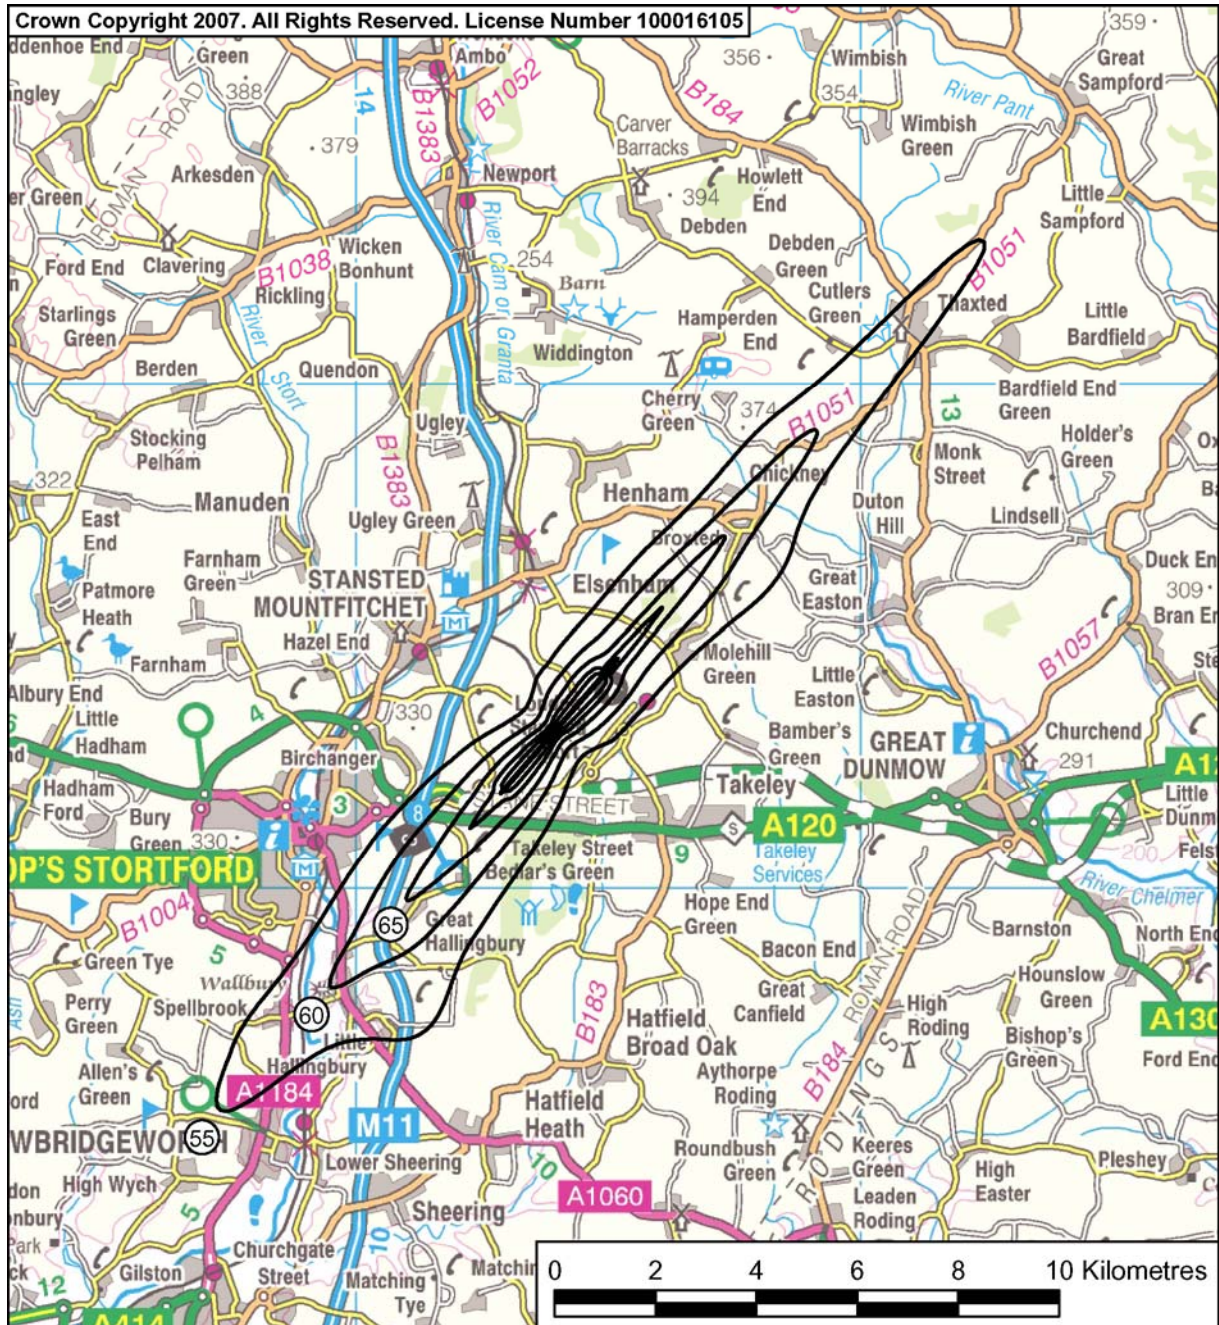

**FIGURE 7: STANSTED AIRPORT**  
**Year 2006 annual 24 hour  $L_{den}$  terrain adjusted Noise Contours**  
**Actual Modal Split 66% south west / 34% north east**

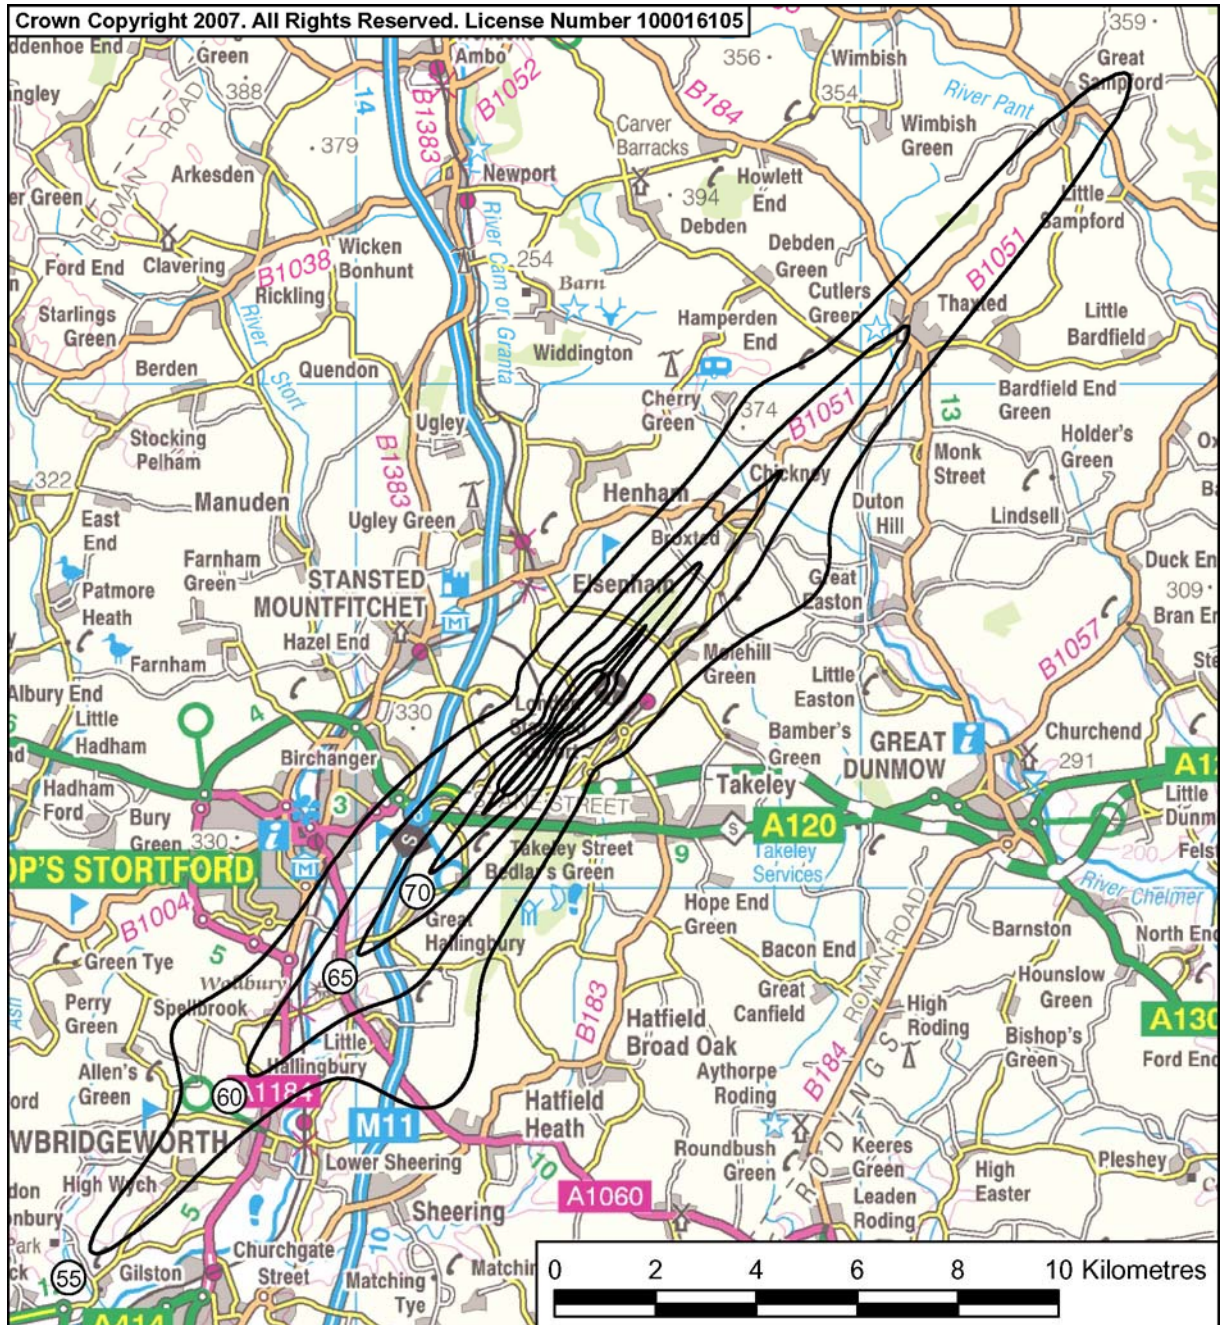

## APPENDIX A ANCON TYPE DESCRIPTIONS

A full list of ANCON types applicable to the Stansted 2006 strategic noise contours is summarised in the Table below:

**Table A1** List of ANCON aircraft type categories (*continued on following page*)

<b>ANCON Type</b>	<b>Type Description</b>
B707C3	All Boeing 707 variants certificated to Chapter 3
B727C3	All Chapter 3 Boeing 727's
B732C3	All Chapter 3 Boeing 737-200's
B733	All Boeing 737-300/400/500 series
B736	All Boeing 737-600/700 series
B738	All Boeing 737-800/900 series
B741	All Boeing 747-100 series
B742C3	All Boeing 747-200/300 series certificated to Chapter 3
B744G	Boeing 747-400 series with General Electric engines
B744P	Boeing 747-400 series with Pratt and Whitney engines
B744R	Boeing 747-400 series with Rolls Royce engines
B747SP	All Boeing 747SP series
B757C	Boeing 757-200 series with RB211-535C engines
B757E	Boeing 757-200 series with RB211-535E4/E4B engines
B757P	Boeing 757-200 series with Pratt and Whitney engines
B762	All Boeing 767-200 series
B763G	All Boeing 767-300 series with General Electric engines
B763P	All Boeing 767-300 series with Pratt and Whitney engines
B763R	All Boeing 767-300 series with Rolls Royce engines
B772G	All Boeing 777-200 series with General Electric engines
B772P	All Boeing 777-200 series with Pratt and Whitney engines
B772R	All Boeing 777-200 series with Rolls Royce engines
B773G	All Boeing 777-300 series with General Electric engines
B773R	All Boeing 777-300 series with Rolls Royce engines
BA46	All BAe 146/Avro RJ series
CRJ	Bombardier Regional Jet 100/200
CRJ700	Bombardier Regional Jet 700
DC87	All McDonnell Douglas DC8-70 series
DC9C3	All McDonnell Douglas DC9 variants certificated to Chapter 3

<b>ANCON Type</b>	<b>Type Description</b>
DC10	All McDonnell Douglas DC10 series
EA30	All Airbus A300 series
EA31	All Airbus A310 series
EA318	All Airbus A318 series
EA319C	Airbus A319 series with CFM-56 engines
EA319V	Airbus A319 series with AE-V2500 engines
EA320C	Airbus A320 series with CFM-56 engines
EA320V	Airbus A320 series with AE-V2500 engines
EA321C	Airbus A321 series with CFM-56 engines
EA321V	Airbus A321 series with AE-V2500 engines
EA33	All Airbus A330 series
EA34	All Airbus A340 200-300 series
EA346	All Airbus A340 500-600 series
ERJ	Embraer EMB135/145 series
ERJ170	Embraer E-170
EXE2	All Chapter 2 executive jets
EXE3	All Chapter 3 executive jets
FK10	All Fokker 70/100 series
L101	All Lockheed L1011-TriStar series
L4P	Large four-engined propeller
LTT	Large twin-turboprop
MD11	All McDonnell-Douglas MD11 series
MD80	All McDonnell-Douglas MD80 series
SP	Single piston
STP	Small twin-piston
STT	Small twin-turboprop
TU54	All Tupolev Tu-154 series