

Unmanned Aircraft Systems

Rotary Wing Swarm Operations – Visual Line of Sight – Requirements, Guidance & Policy

CAP 722E



Published by the Civil Aviation Authority, 2022

Civil Aviation Authority
Aviation House
Beehive Ring Road
Crawley
West Sussex
RH6 0YR

All rights reserved. Copies of this publication may be reproduced for personal use, or for use within a company or organisation, but may not otherwise be reproduced for publication.

To use or reference CAA publications for any other purpose, for example within training material for students, please contact the CAA at the address above for formal agreement.

First edition of CAP 722E, July 2020

Second edition of CAP 722E December 2022

The latest version of this document is available in electronic format at www.caa.co.uk

Contents

Contents	3
Revision history	4
Foreword	5
Point of contact	6
Abbreviations and glossary of terms	7
CHAPTER 1 General introduction	8
1.1 Policy	8
1.2 Scope	8
1.3 Editorial practices	8
CHAPTER 2 Basic requirements for all rotary wing VLOS swarms	10
2.1 OSC Volume 1 – Operations Manual	10
2.2 OSC Volume 2 – Systems	14
2.3 OSC Volume 3 – Safety Risk Assessment	18
2.4 Additional application requirements	18
CHAPTER 3 Additional information	20
3.1 Airspace	20
3.2 VLOS swarm for public display diagrams	22
3.3 Additional guidance for notifying swarm operations using online portal for Airspace Co-ordination and Obstacle Management	23
Appendix A Summary of requirements	25
OSC Volume 1 – Operations Manual	25
OSC Volume 2 – Systems	27
OSC Volume 3 – Safety Risk Assessment	29
Additional application requirements	29

Revision history

Note: Changes made since the previous published edition are notified in red underline.

Second Edition

December 2022

This edition takes into account the changes to the online notification process with the removal of the DAP1918 form and the adoption of the Airspace Co-ordination and Obstacle Management portal. This edition also removes the necessity for the operator to state the specific dimensions and location of the flight volume and replaces it with the necessity to state how the dimensions and planned flight volumes will be calculated for each operation. This edition also requires the operator to explain the minimum composition of the flight crew and support crew/ground crew scalability.

First edition

July 2020

This is the first edition of this document.

Foreword

Aim

The aim of this document is to enable UAS operators to understand the requirements that must be met as part of an application for operational authorisations related to rotary wing UAS swarm operations in visual line of sight (VLOS).

It will indicate which volumes of the operating safety case (OSC) should address each requirement.

For more guidance on the OSC and the application process see [CAP 722A](#) and the UAS application process webpage [here](#).

In advance of further changes to this document, updated information is contained on the CAA website via [UAS Unit web pages](#).

Content

This CAP covers three areas. Chapter 2 describes the basic requirements for all rotary wing VLOS swarms. Chapter 3 provides additional information on airspace, public displays, and notification. Finally, Appendix A is a summary of the requirements listed in Chapter 2.

The content of CAP 722E does not replace the current civil regulations. Wherever possible, this guidance has been harmonised with any relevant emerging international UAS regulatory developments where available.

Availability

The latest version of CAP 722E can be located within the [publications](#) section of the CAA website.

Updated information can be found within the [latest updates](#) section of the CAA website's UAS webpages.

The CAA also provides a more general aviation update service via the [SkyWise system](#), which can be filtered by subject matter for relevant UAS related information.

Structure

CAP 722E, sits within the CAP 722 suite of UAS guidance and policy, which can be found [here](#).

Point of contact

For queries relating to the content of CAP 722E:

GA & RPAS Unit
CAA
Safety and Airspace Regulation Group
Aviation House
Beehive Ring Road
Crawley
West Sussex
RH6 0YR

E-mail: uavenquiries@caa.co.uk

For matters concerning operations or approvals:

Shared Service Centre (UAS)
CAA
Aviation House
Beehive Ring Road
Crawley
West Sussex
RH6 0YR

Telephone: 0330 022 1908

E-mail: uavenquiries@caa.co.uk

Abbreviations and glossary of terms

The definitive list of abbreviations and terms/definitions that are relevant to UAS operations within the UK and for the whole CAP 722 'series' of documents are centralised within [CAP 722D UAS Definitions and Glossary](#).

CHAPTER 1 | General introduction

1.1 Policy

Unmanned aircraft systems (UAS) operating in the UK must meet at least the same safety and operational standards as manned aircraft when conducting the same type of operation in the same airspace.

As a result, when compared to the operations of manned aircraft of an equivalent class or category, UAS operations must not present or create a greater hazard to persons, property, vehicles or vessels, either in the air or on the ground.

However, with unmanned aviation the primary consideration is the type of operation being conducted, rather than who or what is conducting it, or why it is being done. As there is 'no one on board' the aircraft, the consequences of an incident or accident are purely dependent on where that incident/accident takes place. The CAA's focus is therefore on the risk that the UAS operation presents to third parties, which means that more effort or proof is required where the risk is greater.

Swarming is the operation of more than one unmanned aircraft (UA) controlled collectively rather than individually.

1.2 Scope

This document applies to civilian UAS operators wishing to apply for authorisation to operate rotary wing UA as a swarm within visual line of sight (VLOS).

This guidance applies to applications for a single swarm operation at a specific site or for applications for multiple operations at different sites. The OSC will be more straightforward for single operations. The OSC's complexity will increase significantly if the applicant wishes to obtain authorisation to operate a swarm at multiple sites.

Operations of swarms involving fixed wing UA, or flight beyond visual line of sight (BVLOS), are outside the scope of this document. In these cases, UAS operators should contact the CAA directly to discuss further (see page 6 for contact details).

This document describes the requirements for an authorisation to operate a swarm. It also provides guidance for completing the OSC.

1.3 Editorial practices

In this document the following editorial practices apply:

- **'Must'** / **'must not'** indicates a mandatory requirement.
- **'Should'** indicates a strong obligation (in other words, a person would need to provide

clear justification for not complying with the obligation).

- **'May'** indicates discretion.
- 'Describe' / 'explain' indicates the provision of logical argument and any available evidence that justifies a situation, choice, or action.

Requirements that **must** be included within the OSC are underlined within the text of Chapter 2 and Appendix A. For example:

*'The remote pilot(s) **must** be competent to carry out UA swarm operations.'*

CHAPTER 2 | Basic requirements for all rotary wing VLOS swarms

The following requirements **must** be included in the OSC submitted to the CAA for authorisation of UA swarm operations.

This chapter **must** be read in conjunction with [CAP 722A](#) Unmanned Aircraft Systems Operations in UK Airspace – Operating Safety Cases.

For swarming operations, the applicant **must** prepare and submit all 3 volumes of the OSC. Particular attention **should** be paid to the Volume 3 risk assessment. Identified safety risks **must** be specific to the proposed operation and **must** be mitigated to an acceptable level.

Any operator wishing to conduct any swarming flights, including those for testing and development, **must** be in possession of a valid Operational Authorisation issued by the CAA.

2.1 OSC Volume 1 – Operations Manual

The operational requirements listed below **must** be included in Volume 1 of the OSC.

Any safety risks identified under any of these headings, **must** be mitigated to a tolerable and ALARP level.

Volume 3 of the OSC **must** explain why all safety risks identified in Volume 1 are tolerable and ALARP.

This list is not exhaustive and must be read in conjunction with CAP 722A.

2.1.1 Remote pilot competence

The remote pilot(s) **must** be competent to carry out UA swarm operations.

Explain why the operator is satisfied that the remote pilot(s) is competent enough to comply with the conditions of an authorisation.

Explain how the qualifications and experience of the remote pilot(s) ensure they are competent to carry out the swarming operations.

2.1.2 Support crew competence

The support crew **must** be competent to support UA swarm operations.

Explain how the qualifications and experience of the crew ensure they are competent to support swarming operations. An example of a support crew member is a visual observer who keeps a lookout for other airspace users.

Explain the minimum composition of the flight crew/ground support crew including any additional support pilots, observers, crowd marshals etc and explain how the number of flight crew/ground support crew scales with the number of aircraft included in the operational volume.

2.1.3 Line of sight

The swarm operation **must** be carried out within VLOS.

Application for approval of a BVLOS swarm operation is outside the scope of this document.

2.1.4 Dimensions of the flight volume

The planned flight of the swarm **must** remain within the flight volume.

The upper limit of the flight volume **must** be kept as low as possible and only be as high as necessary to accommodate the planned flight of the swarm.

The horizontal dimensions of the flight volume **must** be sufficient to accommodate the planned flight of the swarm.

The flight volume **must** encompass the entire swarm and its planned movement, with sufficient allowance for any operational movement around the flight path.

State how the dimensions of the planned flight volumes will be calculated for each operation. Include calculations for how the Contingency Volume and Emergency Buffer Zones will be created.

2.1.5 Swarm height

The height of the swarm **must** be monitored and accurately measured.

The height of the swarm **should** be based on the height of the highest individual UA at any time during the flight.

Explain how the swarm height is measured and monitored during the flight, and how accuracy is assured.

2.1.6 Airspace

Appropriate airspace **must** be used for the swarm operation.

The OSC **must** contain all the information listed below:

- State the dimensions and location of the flight volume (see paragraph 2.1.4 and [paragraph 3.2](#), figures 1 and 2).
- State the dimensions and location of the contingency volume and emergency buffer (see [paragraph 3.2](#), figures 1 and 2).
- State the class of airspace where the swarm is to be conducted.
- State whether any additional permission is required to operate in the proposed airspace; for example, if the operation is within an FRZ.

- Explain how any additional permission will be applied for.

2.1.7 Notification

All swarm flights **must** be notified in advance to CAA Airspace Regulation Operations (AR Ops).

UAS operators **must** provide details of any swarm flight to AR Ops arops@caa.co.uk at least 28 days before the date of the flight using the [online Airspace Co-ordination and Obstacle Management \(caa.co.uk\) form](#). (See [paragraph 3.3](#) for additional guidance.)

The CAA will issue any NOTAM that is required, following submission of the online form request.

State your notification procedures.

2.1.8 Weather conditions

The swarm operation **must** only be conducted in the appropriate weather conditions.

State the weather limits for the operation and explain how the weather will be monitored during the operation.

2.1.9 Go/no-go criteria

Go/no-go and abort criteria **must** be clearly defined for the swarm operation.

State the go/no-go criteria for the operation.

2.1.10 Emergency abort

The decision to abort the swarm **must** be made quickly and reliably enough, in response to an emergency, to prevent harm to people.

State who will make real-time decisions to abort the flight and what qualifies them to make the decision. This person **must** be physically present at the site of operation while the swarm is in flight.

Explain how the decision to abort will be made quickly and reliably to effectively intervene in an emergency to prevent harm.

State the abort conditions which, if reached, would lead to an immediate and safe termination of the operation. Explain the abort procedures which are in place to enable this decision.

State that the abort decision will always be free from commercial or contractual pressure.

2.1.11 Operating procedures

Operating procedures **must** be clearly defined for the swarm operation.

The OSC **must** state and explain the operating procedures as necessary, including the:

- normal operating procedures
- lost C2 link procedures and protocols
- contingency procedures, including:
 - UA excursion from the flight volume
- emergency procedures, including:
 - aircraft incursion into the operational volume
 - UA excursion from the operational volume
 - uninvolved third parties crossing the crowd line and entering the sterile ground area
- emergency response plan (ERP).

2.1.12 Illumination of take-off, landing and nominated recovery areas

The take-off, landing and nominated recovery areas **must** be sufficiently illuminated.

Use of recovery areas is recommended.

Explain how the take-off, landing and any nominated recovery areas are sufficiently illuminated to ensure safe operation of UA when using the areas.

2.1.13 Insurance

The insurance policy **must** provide adequate cover for swarming operations.

Include copies of the relevant insurance documents.

2.1.14 Projection or dropping of articles

The safety risks associated with the projection or dropping of articles **must** be tolerable and **ALARP**.

Permission from the CAA **must** be obtained for any dropping of articles from a UA.

Explain what articles will be projected or dropped.

Explain how articles will be projected or dropped.

Explain how the safety risk is tolerable and ALARP in Volume 3 of the OSC.

2.1.15 Overflight of uninvolved third parties

The swarm **must not** overfly uninvolved third parties.

See [CAP 722A](#) Appendix A, Overflight of Uninvolved Third Parties, for more information.

Explain how the overflight of uninvolved people will be avoided.

Explain how the safety risk is tolerable and ALARP in Volume 3 of the OSC.

2.1.16 Swarms for public display – sterile ground area

A sterile ground area **must** be in place for the operation.

Uninvolved third parties **must not** be present in the sterile ground area.

The sterile ground area is the entire ground or water area covered by the flight volume, the contingency volume and the emergency buffer. (See [paragraph 3.2](#), figures 1 and 2.)

State the dimensions and location of the sterile ground area.

2.1.17 Swarm for public display – crowd line position

A crowd line **must** be established outside of the sterile ground area for the operation.

A crowd line is applicable to *any* number of uninvolved people.

Based on the sterile ground area description in paragraph 2.1.16, the crowd line **must** be outside the emergency buffer.

The crowd line **must** never be less than 50m from the operational volume.

State the position of the crowd line. (See [paragraph 3.2](#), figures 1 and 2.)

2.1.18 Swarm for public display – crowd line marking and monitoring

Uninvolved third parties **must not** be permitted to cross the crowd line when the swarm is in flight.

Explain how the crowd line will be marked and how its observation will be enforced.

Explain how you will respond if uninvolved third parties cross the crowd line.

2.2 OSC Volume 2 – Systems

The technical requirements listed below **must** be included in Volume 2 of the OSC.

Any safety risks identified under any of these headings, **must** be mitigated to a tolerable and ALARP level.

Volume 3 of the OSC **must** explain why all safety risks identified in Volume 2 are tolerable and ALARP.

This list is not exhaustive and must be read in conjunction with CAP 722A.

2.2.1 UA type

The swarm **must** only be comprised of rotary wing UA.

State the type of UA to be used in the swarm.

2.2.2 Number of UA in the swarm

The number of UA in the swarm **must** be no more than necessary to complete the operation.

The number of UA in the swarm is important; as the number increases, so does the swarm's potential to harm people. It also increases the potential for RF interference, C2 spectrum issues and loss of control or fly-away events.

While the number of UA within the swarm will not necessarily increase the amount of energy transferred to a person if the swarm were to crash, it would affect the *likelihood* of a person being struck.

State the number of UA to be used in the swarm.

2.2.3 UA speed

The highest speed of an individual UA **must** be no greater than necessary to complete the operation.

State the highest speed of the individual UA in the swarm.

2.2.4 UA mass

The mass of an individual UA **must** be no greater than necessary to complete the operation.

State the mass, including payload, of the individual UA in the swarm.

2.2.5 UA kinetic energy

The kinetic energy of an individual UA **must** be no greater than necessary to complete the operation.

Kinetic energy is increased with higher UA speed. Kinetic energy is also increased with greater UA mass. See [CAP 722A](#), Appendix A, Overflight of Uninvolved Third Parties for more information.

State the kinetic energy of the individual UA in the swarm at their highest speed.

2.2.6 UA size

The size of the UA **must** be no larger than necessary to complete the operation.

State the size of the individual UA in the swarm.

2.2.7 Swarm coordination protocol

The swarm **must** be effectively controlled.

State how the UA in the swarm establish and maintain communication with each other through an RF channel. For example, is it a 'lead' and 'follower' configuration, a mesh system, or a pre-defined waypoint configuration?

Describe how individual UA in the swarm avoid one another and obstacles.

2.2.8 Intra-swarm collision avoidance and movement

All UA in the swarm **must** remain separated from each other during the operation.

Explain the collision avoidance and movement co-ordination technologies between UA.

2.2.9 Whole system single points of failure

All single points of failure **must** be identified and mitigated.

State all single points of failure and explain how these points are mitigated in Volume 2 of the OSC.

2.2.10 Known failure modes

All known failure modes **must** be identified and mitigated.

State all known failure modes and explain how these are mitigated in Volume 2 of the OSC.

2.2.11 ADS-B dual frequency receiver

The remote pilot **should** use technical means to supplement visual lookout.

The remote pilot **should** be aware of other ADS-B equipped aircraft close to the operation.

An ADS-B dual frequency receiver operating on 978MHz and 1090MHz **should** be used and **must** be in the same place as the swarm.

ADS-B receivers **may** be airborne, or ground based and **must** be in the immediate vicinity of the swarm.

One ADS-B receiver **may** be used for the entire swarm.

If an ADS-B receiver is used, describe how it will be used to monitor ADS-B equipped aircraft nearby.

Describe the use of any third-party web-based application to supplement visual lookout and explain its limitations in terms of reliability and coverage.

If an ADS-B receiver is not used, explain why.

2.2.12 C2 link

An effective C2 link **must** be maintained between the command unit and the swarm.

State how a C2 link between the command unit and the swarm is assured.

Describe how the C2 link works and the risks of it being lost during the operation.

Describe all technical mitigations designed to prevent the loss of the C2 link. For example, any redundancy provided within the system through the use of independent C2 links.

2.2.13 C2 link frequency

Any interference on the C2 link frequency **must not** present an intolerable risk of the loss of the C2 link.

State which C2 frequency or frequencies will be used.

Explain how potential RF interference is assessed prior to and during the operation. A calibrated spectrum analyser or equivalent signal monitoring system **should** be used before and during flight.

Explain how the operator ensures that they are aware of any notified RF interference for the date and time of the intended flight of the swarm.

2.2.14 C2 link signal latency

The C2 link signal latency **must** be tolerable to maintain control of the swarm.

Describe the proof that the signal latency timing within the C2 link falls within the tolerable limit.

2.2.15 GNSS

The planned flight of the swarm **must** remain within the flight volume.

GNSS **must not** be lost to the extent that the safe and effective control of the swarm cannot be maintained.

It is not a requirement to use GNSS. However, if GNSS is used the following information **must** be included:

- Describe the GNSS equipment used.
- Explain how GNSS is used in the operation and the navigational precision required.
- State the minimum number of satellites required for the operation.
- Explain how the number of satellites is monitored before and during the operation.
- Explain any use of dilution of precision indicators.

2.2.16 'Geo-caging' function

The planned flight of the swarm **must** remain within the flight volume.

A technical function which 'automatically' retains the swarm within a pre-defined airspace volume (sometimes referred to as a 'geo-caging' capability) **must** be used.

The following information **must** be provided:

- Describe the equipment being used to provide this capability.
- Explain how the capability is used in the operation.
- Explain how the navigational data being used accurately represents the flight volume.
- Explain how reliable it is.

2.2.17 Visual conspicuity

The swarm **must** be visually conspicuous.

If operating at night, conspicuity lighting **must** be fitted to each UA.

Display lighting **may** be used for visual conspicuity.

If the swarm is for the purpose of public display, it is accepted that some or all UA may have their conspicuity lights off or flashing for periods of time. These periods **should** be minimised, and operators **must** demonstrate how they will mitigate the safety risk to other air users during periods when some or all UA are not displaying conspicuity lighting.

Describe how periods of flight by UA that are part of a public display and are not displaying conspicuity lighting are minimised.

State the maximum distance that each individual UA can be expected to be seen using unaided eyesight (corrective spectacles **may** be used).

2.2.18 Flight termination function

A flight termination function **must** be available to stop the swarm's flight in an emergency to prevent harm to people.

Explain the flight termination function and how it ensures safe termination of the flight if required.

Explain how the flight termination function ensures the swarm will not leave the emergency buffer.

Return to Home function is not an appropriate flight termination function for swarms.

2.3 OSC Volume 3 – Safety Risk Assessment

All safety risks associated with the operation **must** be tolerable and ALARP.

The safety risk assessment must be carried in accordance with CAP 722A.

It is important to ensure that mitigations that you rely on to reduce safety risk are described in Volumes 1 and 2 of your OSC.

In Volume 3 of the OSC, you **must** explain why all safety risks identified in Volumes 1 and 2 are tolerable and ALARP.

2.4 Additional application requirements

2.4.1 Demonstration flight

A demonstration flight, observed by CAA staff, **must** be conducted.

During the application process the applicant **must** conduct a demonstration flight which will

be observed by CAA staff. The demonstration flight is only required as part of the application process.

The flight **must** comply with the following requirements:

- The flight **must** be carried out in a sterile ground area.
- The flight **must** demonstrate the proposed operation and emergency procedures.
- Relevant equipment capabilities, particularly those which are being relied upon as safety mitigations, **must** be demonstrated.

2.4.2 Third country operators

All third country operators wishing to conduct swarm operations within the UK **must** apply to the UK CAA for authorisation.

Third country operators wishing to conduct swarm operations within the UK **must** already be in possession of an equivalent authorisation to operate within their parent State/State of residence.

The application **must** contain evidence, such as a letter or statement, of authorisation granted by the resident country NAA for swarm operations.

The UAS operator **must** be appropriately registered in order to conduct flying operations within the UK.

CHAPTER 3 | Additional information

3.1 Airspace

This chapter will help applicants create and visualise the airspace associated with the swarm operation.

Applicants **must** describe the airspace required for the operation within the OSC, in accordance with Chapter 2 of this document and [CAP 722A](#).

Applicants **should** provide airspace diagrams.

3.1.1 Flight volume

The upper vertical limit of the flight volume **must** be kept as low as possible and only be as high as necessary to safely accommodate the planned swarm operation.

The flight volume **must** encompass the entire swarm and its planned movement, with sufficient buffer for any operational movement around the flight path. Consideration **should** be given to surrounding airspace, other airspace users and ground risks.

Operational movement includes UA movement for navigational changes, such as turns, and expected weather conditions.

3.1.2 Contingency volume

The contingency volume is adjacent to and surrounds the flight volume. It **must** be large enough to accommodate UA leaving, and manoeuvring to re-enter, the flight volume.

The contingency volume is established to cater for unexpected circumstances, such as manoeuvring the UA to avoid deteriorating weather conditions or other airspace users.

If any UA enters the contingency volume, or the remote pilot suspects it might happen, the contingency procedures **must** be carried out immediately and **must** result in the UA re-entering the flight volume as soon as possible. The contingency procedures **must** be stated in the OSC.

3.1.3 Operational volume

The operational volume is the zone containing the flight volume and the contingency volume.

3.1.4 Emergency buffer

The emergency buffer is airspace that is adjacent to and surrounds the operational volume.

If any UA enter the emergency buffer or the remote pilot suspects it might happen, the emergency response plan (ERP) **must** be carried out immediately.

3.1.5 Dimensions of the emergency buffer

The horizontal and vertical dimensions of the emergency buffer are dictated by two principles:

- It **must** be large enough to contain controlled manoeuvres made by the UA as part of the ERP. This includes flight termination.
- It **must** be large enough to contain the predicted flight path of a UA that leaves the contingency volume in any direction while suffering a total loss of propulsion and control.

3.1.6 Calculating the emergency buffer

The dimensions of the emergency buffer **must** satisfy both principles detailed in paragraph 3.1.5 above.

When calculating the dimensions of the emergency buffer, UAS operators **must** consider all the following points:

- The upper limit of the operational volume:
 - The horizontal dimensions of the emergency buffer **must** be at least the same as the height of the operational volume. This is the minimum distance required. This is referred to as distance 'X' in [paragraph 3.2](#), figures 1 and 2.
- Any technical limitations and capabilities used in the ERP.
- The speed of the UA.
- The effect of wind, and therefore any subsequent drift, on the UA.
- Any other aspects of the operation that might increase the size of the emergency buffer.

3.2 VLOS swarm for public display diagrams

Note: The diagrams are not to scale

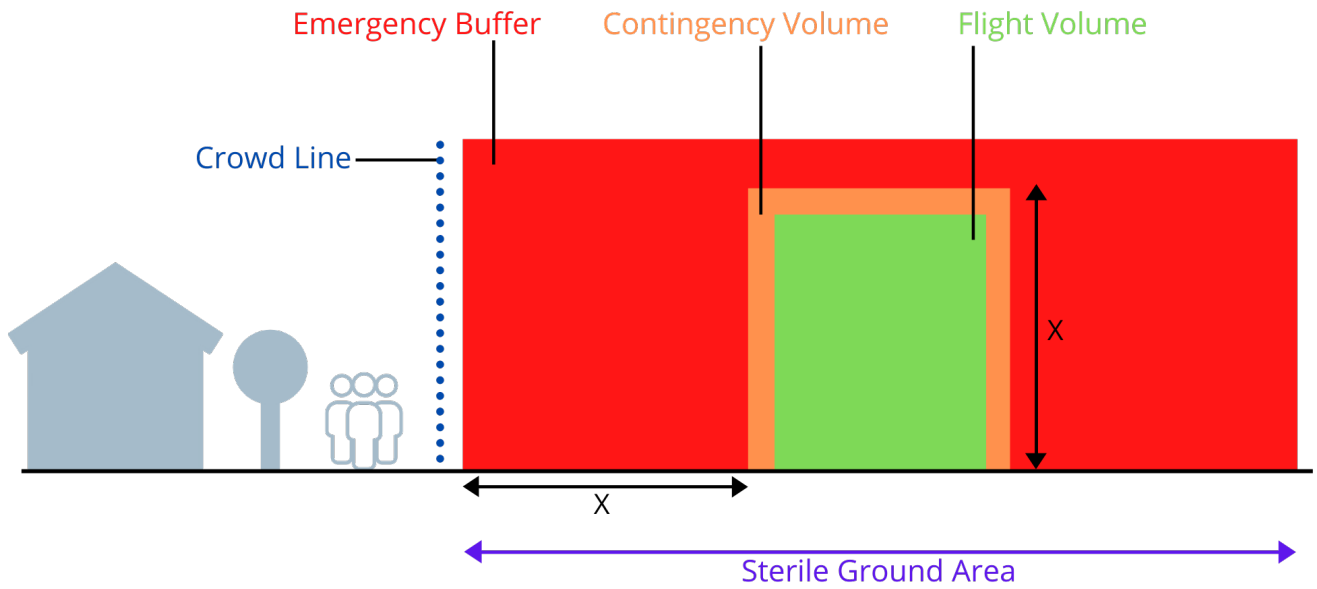


Figure 1. Side elevation view

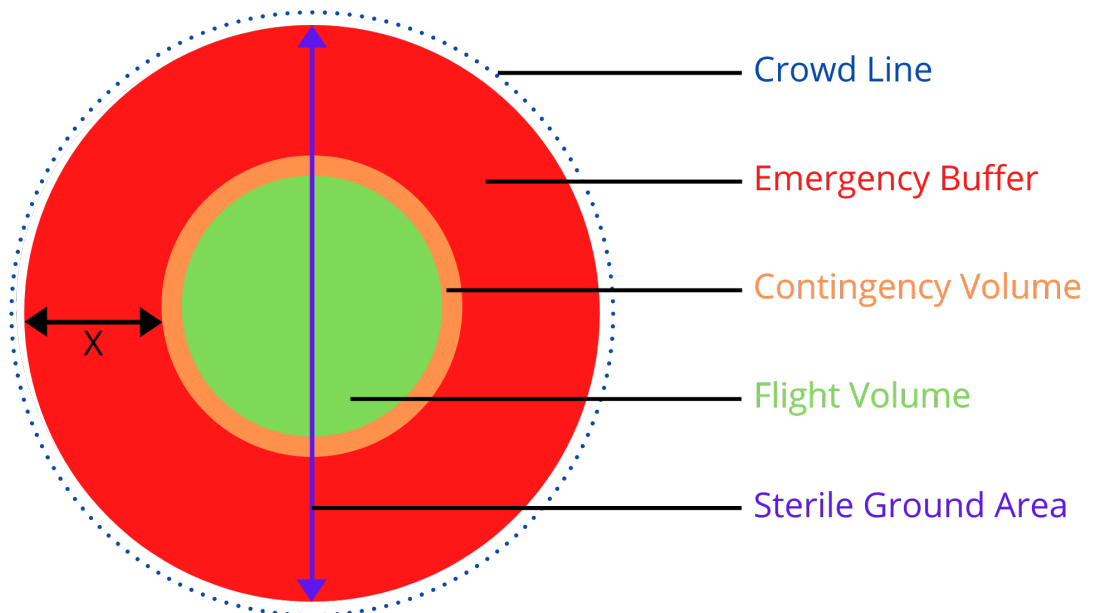


Figure 2. Plan view

3.3 Additional guidance for notifying swarm operations using online portal for Airspace Co-ordination and Obstacle Management

If approval for a swarm operation is granted by the CAA UAS Unit, the operator **must** notify AROps for each intended flight. The form **should** be filled in accordance with the instructions below.

The online form **must** be submitted at least 28 days before the date of the event. Operators **should** factor this time into the application planning timeline.

Operators **must** follow these additional instructions when completing the form:

- *Application*

The activity category **must** be “Remotely Piloted Aircraft”.

- *Applicant Details*

All fields marked with an asterisk **must** be completed.

- *Event Details*

The Activity Type **must** be “Visual Line of Sight”

The description **must** indicate if the purpose of the swarm is for aerial lighting effects. For example, ‘Aerial Lighting using 50 Unmanned Aircraft in a Swarm’.

The number of remotely piloted aircraft in the swarm must be stated.

The description **must** also include details of any periods of time when UA will not be lit, for example as part of a public display.

See [paragraph 2.1.7](#) for more information.

If the flight is to take place within a Flight Restriction Zone, the appropriate aerodrome permission **must** be uploaded.

If the flight is to take place within the vicinity of a Helicopter Landing Site, the names of the sites **must** be provided.

If the flight requires a range of dates or times, these **must** be provided.

A full operational authorisation issued by the CAA **must** be uploaded.

- *Location details*

This section **must** also include the dimensions and position of the airspace required for the swarm operation.

The airspace information is the position and location of the flight volume, contingency volume, and emergency buffer.

The position of the swarm **must** be stated as either an Ordnance Survey grid reference

or WGS84 co-ordinates expressed in latitude and longitude.

The maximum height of the swarm **must** be added in this section.

The maximum height is the upper limit of the operational volume.

The upper limit **must** be expressed in feet AGL.

A telephone number(s) **must** be provided so that operator and remote pilot can be contacted before and during the event.

Telephone numbers will be used for urgent flight safety messages and might be passed to air traffic control agencies for this purpose.

Appendix A | Summary of requirements

Appendix A summarises the requirements listed in Chapter 2.

It **must** be read in conjunction with [CAP 722A](#) – Unmanned Aircraft Systems Operations in UK Airspace – Operating Safety Cases.

OSC Volume 1 – Operations Manual

The operational requirements listed below **must** be included in Volume 1 of the OSC.

This list is not exhaustive and must be read in conjunction with CAP 722A.

Paragraph Number and Title (Paragraph 2.1)	Basic requirement for all rotary wing VLOS swarms (Paragraph 2.1)
2.1.1 Remote pilot competence	<u>The remote pilot(s) must be competent to carry out UA swarm operations</u>
2.1.2 Support crew competence	<u>The support crew must be competent to support UA swarm operations</u>
2.1.3 Line of sight	<u>The swarm operation must be carried out within VLOS</u>
2.1.4 Dimensions of the flight volume	<u>The planned flight of the swarm must remain within the flight volume</u> <u>The upper limit of the flight volume must be kept as low as possible and only be as high as necessary to accommodate the planned flight of the swarm</u> <u>The horizontal dimensions of the flight volume must be sufficient to accommodate the planned flight of the swarm</u>
2.1.5 Swarm height	<u>The height of the swarm must be monitored and accurately measured</u>

Paragraph Number and Title (Paragraph 2.1)	Basic requirement for all rotary wing VLOS swarms (Paragraph 2.1)
<u>2.1.6</u> <u>Airspace</u>	<u>Appropriate airspace must be used for the swarm operation</u>
<u>2.1.7</u> <u>Notification</u>	<u>All swarm flights must be notified in advance to CAA Airspace Regulation Operations (AR Ops)</u>
<u>2.1.8</u> <u>Weather conditions</u>	<u>The swarm operation must only be conducted in the appropriate weather conditions</u>
<u>2.1.9</u> <u>Go/no-go criteria</u>	<u>Go/no-go and abort criteria must be clearly defined for the swarm operation</u>
<u>2.1.10</u> <u>Emergency abort</u>	<u>The decision to abort the swarm must be made quickly and reliably enough, in response to an emergency, to prevent harm to people</u>
<u>2.1.11</u> <u>Operating procedures</u>	<u>Operating procedures must be clearly defined for the swarm operation</u>
<u>2.1.12</u> <u>Illumination of take-off, landing and nominated recovery areas</u>	<u>The take-off, landing and nominated recovery areas must be sufficiently illuminated</u>
<u>2.1.13</u> <u>Insurance</u>	<u>The insurance policy must provide adequate cover for swarming operations</u>
<u>2.1.14</u> <u>Projection or dropping of articles</u>	<u>The safety risks associated with the projection or dropping of articles must be tolerable and ALARP</u>
<u>2.1.15</u> <u>Overflight of uninvolved third parties</u>	<u>The swarm must not overfly any uninvolved third parties</u>
<u>2.1.16</u> <u>Swarm for public display – sterile ground area</u>	<u>A sterile ground area must be in place for the operation</u>
<u>2.1.17</u> <u>Swarm for public display – crowd line position</u>	<u>A crowd line must be established outside of the sterile ground area for the operation</u>

Paragraph Number and Title (Paragraph 2.1)	Basic requirement for all rotary wing VLOS swarms (Paragraph 2.1)
2.1.18 Swarm for public display – crowd line marking and monitoring	<u>Uninvolved third parties must not be permitted to cross the crowd line when the swarm is in flight</u>

OSC Volume 2 – Systems

The operational requirements listed below **must** be included in Volume 2 of the OSC.

This list is not exhaustive and must be read in conjunction with CAP 722A.

Title (Paragraph 2.2)	Basic requirement for all rotary wing VLOS swarms (Paragraph 2.2)
2.2.1 UA type	<u>The swarm must only be comprised of rotary wing UA</u>
2.2.2 Number of UA in the swarm	<u>The number of UA in the swarm must be no more than necessary to complete the operation</u>
2.2.3 UA speed	<u>The highest speed of an individual UA must be no greater than necessary to complete the operation</u>
2.2.4 UA mass	<u>The mass of an individual UA must be no greater than necessary to complete the operation</u>
2.2.5 UA kinetic energy	<u>The kinetic energy of an individual UA must be no greater than necessary to complete the operation</u>
2.2.6 UA size	<u>The size of the UA must be no larger than necessary to complete the operation</u>
2.2.7 Swarm control protocol	<u>The swarm must be effectively controlled</u>

<p style="text-align: center;">Title (Paragraph 2.2)</p>	<p style="text-align: center;">Basic requirement for all rotary wing VLOS swarms (Paragraph 2.2)</p>
<p>2.2.8 Intra-swarm collision avoidance and movement</p>	<p><u>All UA in the swarm must remain separated from each other during the operation</u></p>
<p>2.2.9 Whole system single point of failure</p>	<p><u>All single points of failure must be identified and mitigated</u></p>
<p>2.2.10 Known failure modes</p>	<p><u>All known failure modes must be identified and mitigated</u></p>
<p>2.2.12 C2 link</p>	<p><u>An effective C2 link must be maintained between the command unit and the swarm</u></p>
<p>2.2.13 C2 link frequency</p>	<p><u>Any interference on the C2 link frequency must not present an intolerable risk of the loss of the C2 link</u></p>
<p>2.2.14 C2 link signal latency</p>	<p><u>The C2 link signal latency must be tolerable to maintain control of the swarm</u></p>
<p>2.2.15 GNSS</p>	<p><u>The planned flight of the swarm must remain within the flight volume</u></p>
<p>2.2.16 'Geo-caging' function</p>	<p><u>The planned flight of the swarm must remain within the flight volume</u></p>
<p>2.2.17 Visual conspicuity</p>	<p><u>The swarm must be visually conspicuous</u></p>
<p>2.2.18 Flight termination function</p>	<p><u>A flight termination function must be available to stop the swarm's flight in an emergency to prevent harm to people</u></p>

OSC Volume 3 – Safety Risk Assessment

In Volume 3 of the OSC, you **must** explain why all safety risks identified in Volumes 1 and 2 are tolerable and ALARP.

The safety risk assessment must be carried in accordance with CAP 722A.

Title (Paragraph 2.3)	Basic requirement for all rotary wing VLOS swarms (Paragraph 2.3)
Safety risk assessment	<u>All safety risks associated with the operation must be tolerable and ALARP</u>

Additional application requirements

Title (Paragraph 2.4)	Basic requirement for all rotary wing VLOS swarms (Paragraph 2.4)
2.4.1 Demonstration flight	<u>A demonstration flight, observed by CAA staff, must be conducted</u>
2.4.2 Third country operators	<u>All third country operators wishing to conduct swarm operations within the UK must apply to the UK CAA for authorisation</u> <u>Third country operators wishing to conduct swarm operations within the UK must already be in possession of an equivalent authorisation to operate within their parent State/State of residence</u>